



Designed in France • Manufactured in China

WELDING COLLISION REPAIR CHARGE



MMA - TIG - MIG-MAG - PLASMA CUTTING - PROTECTION
DENT PULLING - CHARGERS - BSU - STARTERS - BOOSTER - ACCESSORIES

2026B

A solid manufacturing group



900 people

C1+

Credit Rating
Banque de France



€ 140 000 000



55 000 m²
2 factories



CHINESE MANUFACTURER
SINCE 2001

A family company



Nicolas & Bruno
Bouygues



Global coverage

125 countries

5 catalogues

3 500+ references



MMA/SMAW
TIG/GTAW
MIG-MAG/
GMAW-FCAW
Plasma cutting
Stud welding
Spot welding
Accessories
Protection
Consumables



Spot welding
Dent pulling
MIG-MAG/
GMAW-FCAW
Plasma cutting
Induction heating
Riveting
Lifting
Bodyshop tools



Chargers
Battery support units
Boosters
Starters
Testers
Portable energy
Jumper cables
EV charging
Accessories



Releasing
Shrink-fitting
Stripping
Straightening
Dent removal
Bending
Brazing



MMA/SMAW
TIG/GTAW
MIG-MAG/
GMAW-FCAW
Plasma cutting
Charge

GYS China factory

100% integrated production



 **GYS FRANCE**
Laval



 **GYS CHINA**
Shanghai



 **GYS GERMANY**
Aachen



 **GYS U.K.**
Rugby



 **GYS ITALIA**
Venezia



 **GYS IBERICA**
Madrid

2 Modern factories

Table of contents

MMA/SMAW	4 > 11
TIG/GTAW	12 > 13
MIG-MAG WELDING	14 > 23
PLASMA CUTTING	24
ACCESSORIES WELDING	25 > 28
INDIVIDUAL PROTECTIONS	28 > 31



MIG-MAG COLLISION REPAIR	32 > 33
DENT PULLING	34 > 47
GLUE PULLING REPAIR	41
ACCESSORIES COLLISION REPAIR	48 > 51
CHARGERS & BATTERY SUPPORT UNIT	52 > 63
STARTERS	64 > 65
BOOSTERS	66 > 74
JUMPER CABLES • INVERTERS • TESTERS	75 > 80



GYSMI

MMA INVERTER

100 ▶ 200 A



230 V

GYSMI 100A

230 V • 1 ~

100 A ⚡ — Ø 1.6+2.5 mm

HS AF Anti Sticking




083622 ☞/▲ 29 × 17 × 16 cm / 3.2 kg

GYSMI 120A

230 V • 1 ~

120 A ⚡ — Ø 1.6+3.2 mm

HS AF Anti Sticking




083639 ☞/▲ 33 × 14 × 27 cm / 4.5 kg

GYSMI 160A

230 V • 1 ~

160 A ⚡ — Ø 1.6+5 mm


HS AF Anti Sticking



083646 ☞/▲ 30 × 18 × 17 cm / 4.6 kg



085107 ☞/▲ 35 × 14 × 30 / 3.6 kg




083790 ☞/▲ 33 × 14 × 27 cm / 5.2 kg



083745 ☞/▲ 38 × 22 × 24 cm / 5.1 kg



083752 ☞/▲ 39 × 31 × 25 cm / 6.4 kg



TIG LIFT



230 V

GYSMI 200A

230 V • 1 ~

200 A ⚡ Ø 1.6+5 mm

HS AF Anti Sticking



1.6 m, 16 mm² + 1.6 m, 16 mm²
083653 ☞/⚡ 34 × 20 × 18 cm / 5 kg



1.6 m, 16 mm² + 1.6 m, 16 mm²
088665 ☞/⚡ 33 × 27 × 19 cm / 6.2 kg

NEW

GYSMI E160

230 V • 1 ~

160 A ⚡ Ø 1.6+4 mm

HS AF Anti Sticking TIG LIFT



083776 ☞/⚡ 33 × 13 × 27 cm 5.2 kg



1.6 m, 16 mm² + 1.6 m, 16 mm² Techno 11
083783 ☞/⚡ 38 × 22 × 24 cm 5.1 kg

 CE NORM. EN60974-1	~			I ₂				 :  → 20s →  ...	INTEGRATED TECHNOLOGY					X% GYS (20°C)	EN60974-1 (40°C)								
		50/60 Hz	A	(MMA) A	(TIG) A	Ø mm	Ø1.6	Ø2	Ø2.5	Ø3.2	Ø4	Ø5	HS	AF	Anti sticking	TIG Lift	ADS	for normal use	I (60%)	X% (I2 max)	U _o	Protected & compatible power generator (+/-15%)	
GYSMI 100A	1	230V	16	10 → 100	—	1.6 + 2.5	62	50	20	—	—	■	■	■	—	—	25% @ 100 A	50 A	14%	63 V	6.5 kW	7.5 kVA	
GYSMI 120A	1	230V	16	10 → 120	—	1.6 + 3.2	62	50	47	24	—	■	■	■	—	—	40% @ 120 A	70 A	20%	64 V	4.5 kW	5.0 kVA	
GYSMI 160A	1	230V	16	10 → 160	—	1.6 + 4	62	50	38	18	7	■	■	■	—	—	20% @ 160 A	85 A	10%	72 V	6.5 kW	7.5 kVA	
GYSMI 200A	1	230V	32	20 → 200	—	1.6 + 5	62	50	47	31	16	6	■	■	■	—	—	20% @ 200 A	90 A	10%	63 V	7.5 kW	10 kVA
GYSMI E160	1	230V	16	10 → 160	—	1.6 + 4	62	50	38	18	7	■	■	■	■	—	20% @ 160 A	85 A	10%	66 V	6.5 kW	7.5 kVA	



GYSTEC


MMA INVERTER

160 ▶ 200 A

P400 PROTEC 400



Tested on 400 V in production



230 V

GYSTEC 160 LA

230 V • 1 ~

160 A

⚡ Ø 1.6+4 mm

HS AF Anti Sticking TIG LIFT



1.6 m, 16 mm² + 1.6 m, 16 mm²
084902 ☐/▲ 30 × 18 × 22 cm / 4.8 kg



NEW



1.6 m, 16 mm² + 1.6 m, 16 mm²
088436 ☐/▲ 33 × 19 × 27 cm / 5.4 kg


GYSTEC 180 LA

230 V • 1 ~

180 A

⚡ Ø 1.6+4 mm

HS AF Anti Sticking TIG LIFT



2 m, 16 mm² + 1.6 m, 16 mm²
083554 ☐/▲ 37 × 17 × 31 cm / 6.9 kg



2 m, 16 mm² + 1.6 m, 16 mm² + Techno 11
084919 ☐/▲ 37 × 22 × 27 cm / 6 kg


GYSTEC 200 LA

230 V • 1 ~

200 A

⚡ Ø 1.6+5 mm

HS AF Anti Sticking TIG LIFT





3 m, 16 mm² + 3 m, 16 mm²
084926 ☐/▲ 37 × 17 × 31 cm / 7.3 kg

OPTIONS

TIG LIFT
TIG torch kit SR17V (valve)

4 m, 10/25 mm²
087583



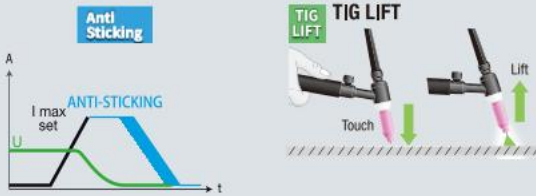

230 V DIGITAL

GYSTEC 180 E

230 V • 1 ~

180 A

Ø 1.6 + 4 mm

HS AF Anti Sticking TIG LIFT



2 m, 16 mm² + 1.6 m, 16 mm²

087712 ☞/▲ 37 × 17 × 31 cm / 6.7 kg



230 V DIGITAL PFC

GYSTEC E180 PFC

230 V • 1 ~

180 A

Ø 1.6 + 4 mm

P400 PFC VRD inside HS AF Anti Sticking TIG LIFT ADS

MMA PULSE



3 m, 16 mm² + 3 m, 16 mm²

083608 ☞/▲ 48 × 23 × 40 cm / 11.4 kg

	MADE IN GYS CHINA	~			I ₂		  → 20s →  ... # electrode / h							INTEGRATED TECHNOLOGY									X% GYS (20°C)	EN60974-1 (40°C)			
			50/60 Hz	A	(MMA) A	(TIG) A	Ø mm	Ø1.6	Ø2	Ø2.5	Ø3.2	Ø4	Ø5	P400	PFC	VRD	HS	AF	Anti sticking	MMA PULSE	TIG Lift	ADS	for normal use	I (60%)	X% (I2 max)	U ₀	Protected & compatible power generator (+/-15%)
GYSTEC 160 LA		1	230V	16	10+160	10+160	1.6+4.0	62	50	38	18	7	—	—	—	—	■	■	■	—	■	—	20% @ 160 A	75 A	10%	65 V	6.5 kW 7.5 kVA
GYSTEC 180 LA		1	230V	16	15+180	15+180	1.6+4.0	62	50	40	30	15	—	—	—	—	■	■	■	—	■	—	30% @ 180 A	95 A	15%	64 V	7 kW 10 kVA
GYSTEC 200 LA		1	230V	16	15+200	15+200	1.6+5.0	62	50	40	30	15	6	—	—	—	■	■	■	—	■	—	25% @ 200 A	100 A	12%	64 V	7.5 kW 10 kVA
GYSTEC 180 E		1	230V	16	20+180	20+180	1.6+4.0	62	50	40	30	15	—	—	—	—	■	■	■	—	■	—	32% @ 180 A	105 A	17%	64 V	7 kW 10 kVA
GYSTEC E180 PFC		1	230V	16	15+180	15+180	1.6+4.0	62	50	47	40	20	—	■	■	■	■	■	■	■	■	■	40% @ 180 A	110 A	20%	64 V	7 kW 10 kVA



MMA/ SMAW

INVERTER

1~ & 3~ • 200 , 400 A

PROGYS

8



WPQR
EN 1090
certified

ACCESSORIES & CONSUMABLES

14



PROGYS

P400 PROTEC 400

MMA INVERTER 200 A



Tested on 400 V in production
Testé en production à 400 V



230 V

PROGYS 200 CEL

200 A

Ø 1.6-5 mm



P400	SR	VRD inside	HS	AF	CEL	cellulosic
Anti Sticking	i+	MMA PULSE	Dynamic arc system			
ALU	aluminium	TIG LIFT	TIG PULSE			



3 m, 25 mm²

082052



3 m, 25 mm²

CE NORM. EN60974-1	MADE IN GYS CHINA	50/60 Hz	m	I ₂ MMA	A
PROGYS 200 CEL		230 V 1~	2	16	20 + 200
				32	10 + 200
PROGYS 200 FV		110 V 1~	2	16	10 + 120
				32	10 + 120
PROGYS 220 FV CEL		230 V 1~	2	16	10 + 220
				32	10 + 220



110 · 230 V FV

PROGYS 200 FV

200 A

Ø 1.6 + 5 mm




083615

PROGYS 220 FV CEL

220 A

Ø 1.6 + 5 mm

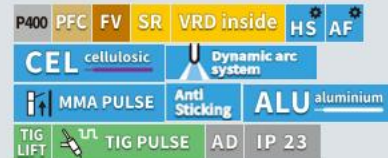

082755

INTEGRATED TECHNOLOGY															X% GYS (20°C)		EN60974-1 (40°C)						
P400	PFC	FV	SR	VRD	HS	AF	Anti sticking	CEL	ALU	Dynamic arc	MMA pulse	TIG Lift	TIG pulse	AD	IP23	for normal use	I (60%)	X% (I2max)	100%	Uo	Protected & compatible power generator (+/-15%)		L x W x H cm kg
																25% @ 200A	100 A	10%	90 A	81 V	10 kW	12.5 kVA	37 x 25 x 31 / 10.2
																30% @ 200 A 20% @ 120 A	110 A 60 A	15% 10%	80 A 50 A	64 V	10 kW	12.5 kVA	40 x 25 x 31 / 11.7
																40% @ 220 A 60% @ 120 A	130 A 90 A	20% 30%	100 A 70 A	86 V 80 V	10 kW	12.5 kVA	46 x 28 x 36 / 14.3



PROGYS

MMA INVERTER 250 ▶ 400 A

OPTIONS

TIG torch kit
SR17 V (valve)
4 m, 35/50 mm²,
Ø13
087590



TIG HF
EXATIG



UNIVERSAL

EXATIG
013780



MADE IN FRANCE



3 m
400 V

Compatible

TIG HF
EXATIG

35/50 mm²
Ø 13 mm



3 m
400 V

Compatible

TIG HF
EXATIG

35 50 mm²
Ø 13 mm

400 V • 3 ~

PROGYS 250 TRI

250 A

⌀ 1.6+5 mm

VRD inside HS AF Anti Sticking CEL cellulosic TIG LIFT IP 23



3 m, 25 mm²



3 m, 25 mm²

083561

PROGYS 300 TRI

300 A

⌀ 1.6+6.3 mm

VRD inside SR HS AF Anti Sticking CEL cellulosic Dynamic arc system >100V
TIG LIFT IP 23 GOUGING ALU aluminium



no accessories:

082762

 MADE IN GYS CHINA	~			I ₂ MMA	INTEGRATED TECHNOLOGY										X% GYS (20°C)	EN60974-1 (40°C)			 Protected & compatible power generator (+/-15%)			
		50/60 Hz	 m	A	A	SR	VRD	HS	AF	Anti sticking	CEL	ALU	Dynamic arc	TIG Lift	IP23	for normal use	I (60%)	X% (I2 max)	100%	U _o	L×W×H cm / kg	
PROGYS 250 TRI	3	400 V	3	16	20→250	■	■	■	■	■	■	—	—	■	■	30% @ 250 A	177 A	30%	137 A	83 V	10 kW 12.5 kVA	46×33×40 / 19
PROGYS 300 TRI	3	400 V	3	16	20→300	■	■	■	■	■	■	■	■	■	■	60% @ 300 A	300 A	60%	230 A	83 V	10 kW 12.5 kVA	57×30×49 / 27.2

VRD inside

Voltage Reduction Device

Software & Hardware protection

VRD ON VRD OFF

U₀ =


300 TRI	20 V	83 V
400 TRI	20 V	84 V

IP 23

INDOOR
/OUTDOOR




Compatible



4 in 1



MMA



TIG DC LIFT
Torches/consumables p. 33



GOUGING
Accessories p. 15



TIG HF •
Exatig



70.95 mm²
Ø 13 mm

400 V • 3 ~

PROGYS 400 TRI

400 A ⚡ Ø 1.6+6.3 mm



VRD inside	SR	HS	AF	Anti Sticking	CEL cellulosic
Dynamic arc system >100V	TIG LIFT	GOUGING	IP 23		
ALU aluminium					

no accessories :
082779

OPTIONS

MMA KIT 7
500 A
047419

for :
✓ PROGYS 400



L m	model	L m	model	mm ²	mm ²
5	SHARK X500.95	4	TYREX 600.95	50	35.50

CE NORMA EN60974-1	MADE IN GYS CHINA	~	50/60 Hz	↔ m	A	I ₂ MMA	INTEGRATED TECHNOLOGY										X% GYS (20°C)	EN60974-1 (40°C)		100%	U ₀	Protected & compatible power generator (+/-15%)	L×W×H cm ; kg
							SR	VRD	HS	AF	Anti sticking	CEL	ALU	Dynamic arc	TIG Lift	IP23		I (60%)	X% (I2 max)				
PROGYS 400 TRI		3	400 V	4	32	20+400	■	■	■	■	■	■	■	■	■	■	60% @ 400 A	400 A	60%	350 A	84 V	30 kW 36 kVA	60 × 33 × 54 ; 40



PROTIG


TIG
DC

P400 PROTEC 400



Tested on 400 V in production

SR SECONDARY REGULATION



AID ADJUST IDEAL POSITION



EN 60974-7	SR 26	
	GRIP	DB
X% DC	180 A (35%)	
X% AC	130 A (35%)	
Ø 35/50 AMPHENOL	4 m	072220

IP 23

INDOOR /OUTDOOR



DC

PROTIG 200 DC

200 A

230 V · 1~

P400 SR AID TIG PULSE IP 21
L/DB MMA PULSE



2m, 25mm²

2m, 25mm²

SR26DB, 4m

062009

PROTIG 250 DC TRI

250 A

400 V · 3~

SR AID TIG PULSE IP 23
L/DB MMA PULSE



4m, 25mm²

SR26DB, 4m

082649

no accessories

082632

 MADE IN GYS CHINA EN60974-1			I ₂ TIG	I ₂ MMA	INTEGRATED TECHNOLOGY										TIG			MMA					
															EN60974-1 (40°C)			EN60974-1 (40°C)					
	50 / 60 Hz	A	A	A	P400	PFC	FV	SR	VRD	AID	TIG PULSE	MMA PULSE	CEL	IP	IA (60%)	X% (I2 max)	100%	IA (60%)	X% (I2 max)	U _o	Protected & compatible power generator (+/-15%)	L × W × H cm / kg	
PROTIG 200 DC	230V 1~	16	5+200	10+160	■	—	—	■	—	■	0.1+900 Hz	1+20 Hz	—	21	115 A	20%	90 A	90 A	20%	65 V	7.5 kW	10 kW	46 × 31 × 37 / 16
PROTIG 250 DC TRI	400V 3~	16	5+250	10+220	—	—	—	■	—	■	0.1+900 Hz	1+20 Hz	—	23	190 A	35%	147 A	168 A	35%	58 V	10 kW	12.5 kVA	46 × 33 × 40 / 19.5



PROTIG

TIG

AC/DC



Youtube

VRD inside Voltage Reduction Device

Software & Hardware protection

	U ₀ (EN60974-1)	U (Voltmeter)
VRD ON	26 V	29 V
VRD OFF	70 V	57 V
ON + OFF sensibility	< 200 Ω	
OFF + ON delay	< 0.3 s	

PFC POWER FACTOR CORRECTION

185 V ← 265 V



100 m

FV FLEXIBLE VOLTAGE

85 V ← 265 V



100 m



35/50 mm²
Ø 13 mm



35/50 mm²
Ø 13 mm

AC / DC

PROTIG 200 AC/DC

200 A

230 V · 1 ~

P400 SR VRD inside TIG PULSE IP 21
L/DB AD MMA PULSE



2m, 25mm² 2m, 25mm² SR26DB, 4m
068742

PROTIG 230 AC/DC FV

230 A

110 → 230 V · 1 ~

P400 SR VRD inside TIG PULSE AID
L/DB/P AD MMA PULSE



2m, 25mm² 2m, 25mm² SR26DB, 4m
083967

 EN60974-1			I ₂ TIG		INTEGRATED TECHNOLOGY							TIG				Freq. AC		 Protected & compatible power generator (+/-15%)		
			A									EN60974-1 (40°C)								
			50 : 60 Hz	A	AC	DC	P400	PFC	FV	SR	VRD	AID	TIG PULSE	I (60%)		X% (I2 max)	Hz	U _o		
PROTIG 200 AC/DC	230 V · 1~	16	10 → 200	10 → 160	■	—	—	■	■	■	0.1 + 900Hz (DC) 0.1 + 20 Hz (AC)	AC 115 A	DC 90 A	AC 20%	DC 20%	20 → 200	64 V	7.5 kW	10 kW	47 × 34 × 39 / 18.8
	110 V · 1~	32	10 → 160	10 → 140	■	■	■	■	■	■	0.1 + 900Hz (DC) 0.1 + 10 Hz (AC)	AC 120 A	DC 120 A	AC 20%	DC 20%	20 → 200	72 V	8.5 kW	12.5 kW	47 × 34 × 39 / 19.5
PROTIG 230 AC/DC FV	230 V · 1~	16	10 → 230	10 → 180	■	■	■	■	■	■	0.1 + 900Hz (DC) 0.1 + 10 Hz (AC)	AC 120 A	DC 140 A	AC 20%	DC 20%		83 V	8.5 kW	12.5 kW	

PROTIG

TIG DC • AC DC



SMARTMIG

MIG/MAG TRADITIONAL

110 ▶ 180 A



Youtube


 PATENTS REGISTERED NUMBERS 002279893
EUROPEAN TRADEMARK & DESIGN

230 V • 1~
SMARTMIG 110
110 A ⚡ ⌀ 100

NO GAS

 2 m
033993

SMARTMIG 142
140 A ⚡ ⌀ 100/200

GAS NO GAS

 2 m
033153

SMARTMIG 162
160 A ⚡ ⌀ 100/200

GAS NO GAS

160 A on 13A fuse


 2 m
033160
034297

SMARTMIG 182
180 A ⚡ ⌀ 200/300

GAS NO GAS


 3 m
033184


CE NORM. MADE IN GYS CHINA EN60974-1						EN60974-1 (40°C)										Équipement d'origine Original equipment Originalausrüstung Equipamento de fabrica				
	50 / 60 Hz	A	EOR	A	Reg	IA (60%)	X% (I2 max)	Uo (V)	Electronic Control	100 mm 1 kg	200 mm 5 kg	300 mm 15 kg	GAS	NO GAS	Ø mm	TYPE		cm / kg	Protected & compatible power generator (+/-15%)	
SMARTMIG 110	230V 1~	13	—	40 → 110	2	—	85A @ 6%	25.5+30		■	—	—	—	0.6 → 0.9	0.9	D-044081		40 × 19 × 39 13.6	3 kW	
SMARTMIG 142	230V 1~	13	—	40 → 140	4	60	90A @ 20%	28+39		■	■	—	0.6 → 0.8	0.6 → 0.9	0.6 / 0.8	A-042339		50 × 25 × 44 22.5	3.5 kW	
SMARTMIG 162	230V 1~	16	■	30 → 160	4	70	115A @ 20%	25.5+40		■	■	—	0.6 → 1.0	0.9 → 1.2	0.6 / 0.8	A-042339		56 × 26 × 46 28.1	5 kW	
SMARTMIG 182	230V 1~	16	■	35 → 180	4	80	140A @ 15%	28+45		—	■	■	0.6 → 1.0	0.9 → 1.2	0.6 / 0.8	A-042339		78 × 30 × 67 / 52	6 kW	



MIG/MAG TRADITIONAL

200 ▶ 250 A

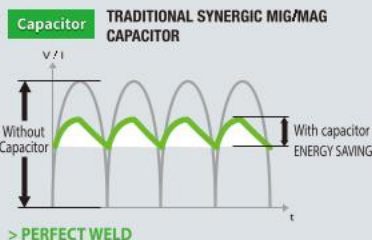

Youtube

SYNERGIC • EASY TO USE
- Auto adaptative wire speed



230 V • 1~

240 V • 1~

400 V • 3~

230 / 400 V • 3~

MONOGYS 200-4 CS

200 A ⚡ ⌀ 200/300

GAS **Capacitor**



065949

MONOGYS 250-4 CS

250 A ⚡ ⌀ 200/300

GAS **Capacitor**



020368

TRIMIG 200-4S

200 A ⚡ ⌀ 200/300

GAS



033818

TRIMIG 250-4S DV

250 A ⚡ ⌀ 200/300

GAS



033825



EASYMIG

MIG/MAG INVERTER

85 ▶ 160 A



Youtube

NO GAS

Flux cored wire



- ✓ Consumables durability
- ✓ Extended torch lifetime
- ✓ Cost reduction

OPTIONS

No Gas Welding Kit Ø 0.9

041240

150 A

type A

Included

Isolated Nozzle (x1)

+

M6 - Ø 0.9 1.0 (x3)

+

Special no gas - Type A
Ø 0.9-1.0 / 1.2 (x1)

EASYMIG 85

85 A

⌀ 100



NO GAS



+ 1kg flux-cored



2.1 m, 10 mm²



1.6 m, 10 mm²

065536

EASYMIG 130

120 A

⌀ 100



GAS NO GAS MMA




2 m



1.6 m, 16 mm²

032231

Steel cored wire no gas



100 mm Ø 0.9 086104
0.9 kg
200 mm Ø 0.9 086265
4.5 kg

CE WORM EN60974-1	MADE IN GYS CHINA	50 / 60 Hz	A	EURO	I ₂ MMA	I ₂ MIG	MIG		MMA	
							EN60974-1 (40°C)		EN60974-1 (40°C)	
							IA (60%)	X% (I ₂ max)	IA (60%)	X% (I ₂ max)
EASYMIG 85		230 V 1~	16	—	—	30 + 85	50	85 A @ 20%	—	—
EASYMIG 130		230 V 1~	16	—	20 + 100	30 + 120	70	120 A @ 20%	60	100 A @ 20%
EASYMIG 140		230 V 1~	16	■	20 + 120	30 + 140	80	140 A @ 15%	70	120 A @ 15%
EASYMIG 150		230 V 1~	16	■	20 + 120	30 + 140	80	140 A @ 15%	70	120 A @ 15%
EASYMIG 160		230 V 1~	16	■	20 + 140	30 + 160	95	160 A @ 20%	90	140 A @ 20%

EASY TO USE

Example / Exemple EASYMIG 160



EASYMIG 140

140 A Ø 100

GAS **NO GAS** **MMA**



2 m 1.6 m, 16 mm² 1.6 m, 10 mm²
032262

EASYMIG 150

140 A Ø 100/200

GAS **NO GAS** **MMA**



2 m 1.6 m, 16 mm² 1.6 m, 10 mm²
032248

EASYMIG 160

160 A Ø 100/200

GAS **NO GAS** **MMA**



2 m 1.6 m, 16 mm² 1.6 m, 16 mm²
032255

						 Ø mm		 Ø mm	Original equipment Équipement d'origine Originalausstattung Equipamiento de fabrica				
Uo (V)	Electronic Control	100 mm 1 kg	200 mm 5 kg	300 mm 15 kg	MIG/MAG (Gas)	Flux Cored Wire (Gas / No Gas)	MMA		TYPE		L × W × H cm / kg	L × W × H cm / kg	
30		■	—	—	—	0.6 + 0.9	—	0.6 / (no gas) / 0.9 (no gas)	D-068926	0.6	39 × 24 × 29 / 7.9	29 × 14 × 20 / 5.6	
62		■	—	—	0.6 + 0.8	0.6 + 0.9	1.6 + 3.2	0.8 (gas) / 0.9 (no gas)	D-039476	0.8/0.9	43 × 18 × 42 / 10.5	34 × 16 × 31 / 7.2	
62		■	—	—	0.6 + 0.8	0.6 + 0.9	1.6 + 3.2	0.8 (gas) / 0.9 (no gas)	D-039476	0.8/0.9	43 × 19 × 42 / 11.3	34 × 16 × 31 / 8	
62		■	■	—	0.6 + 0.8	0.6 + 0.9	1.6 + 3.2	0.8 (gas) / 0.9 (no gas)	A-046856	0.8/0.9	52 × 25 × 36 / 13	41 × 21 × 30 / 9.8	
59		■	■	—	0.6 + 0.8	0.6 + 0.9	1.6 + 3.2	0.8 (gas) / 0.9 (no gas)	A-046856	0.8/0.9	50 × 24 × 36 / 14.3	43 × 21 × 31 / 10.3	



MULTIWELD

MIG/MAG INVERTER 180 ▶ 320 A

3
in 1

GAS
NO GAS
MMA
Anti Sticking

INDOOR /
OUTDOOR
IP 23
✓ 220M-C
✓ 320T-C

Ø 200/300



230 V • 1 ~

MULTIWELD 180M-C

180 A

230 V • 1 ~

P400 GAS NO GAS MMA Anti Sticking



078727



110 • 230 V • 1 ~

MULTIWELD FV 220M-C

220 A

110 → 230 V • 1 ~

P400 PFC FV GAS NO GAS MMA Anti Sticking



065499

OPTIONS

NO GAS WELDING KIT Ø 0.9 - Kit soudage no gaz Ø 0.9
- Schweißset Fülldraht

NO GAS

250 A type A 072336

✓ Multiweld FV 220M-C ✓ Multiweld 250T-C



+

042346



250 A type B 072343

✓ Multiweld 320T-C



CO2 Gas heater and regulator

MULTIWELD only
AC36V:150W

RH-258,
G5/8 CN
063341

GH-258,
G3/4 Russia
063358

Diabie
JOBSITE XL
039568

36V plug inside




*Only available from GYS China



EASY TO USE

MULTIWELD 180M-C

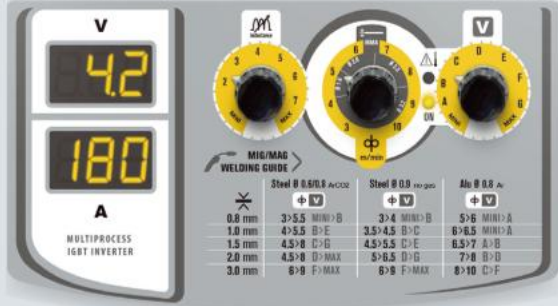

EASY TO USE

MULTIWELD FV 220M-C • 250T-C • 320T-C



400 V • 3 ~

MULTIWELD 250T-C

250 A 400 V • 3 ~

P400 GAS NO GAS MMA Anti Sticking

3 m 4 m, 25mm²

078659

MULTIWELD 320T-C

320 A 400 V • 3 ~

P400 GAS NO GAS MMA Anti Sticking IP 23

4 m 4 m, 35mm²

079274

 MADE IN GYS CHINA EN60974-1				 I ₂ MMA	 I ₂ MIG	EN60974-1 (40°C)				 U _o (V)				 ∅ mm			 ∅ mm	Original equipment Equipement d'origine Originalausstattung Equipamiento de fabrica			 Protected & compatible power generator (+/-15%)	 L × W × H cm / kg
						MIG		MMA														
						IA (60%)	X% (I ₂ max)	IA (60%)	X% (I ₂ max)										TYPE			
MULTIWELD 180M-C	230V 1~	3x 1.5	2	16	20 → 150	30 → 180	110	180 A @ 20%	100	150 A @ 20%	59		■	■	0.6 → 0.8	0.6 → 0.9	1.6 → 3.2	0.8/0.9	A 046856	0.8	7.5 kW	58 × 30 × 49 / 21.1
MULTIWELD FV 220M-C	110V 1~	3x 2.5	2	32	30 → 200	30 → 220	160	220 A @ 20%	140	200 A @ 20%	75		■	■	0.6 → 1.2	0.9 → 1.2	1.6 → 5	0.8/1.0	A 041189	0.8	8 kW	71 × 34 × 55 / 32
	230V 1~			16													1.6 → 5	0.8/1.0	A 041189	0.8	8 kW	71 × 34 × 55 / 32
MULTIWELD 250T-C	400V 3~	4x 1.5	3	16	40 → 220	40 → 250	170	250 A @ 20%	150	220 A @ 20%	59		■	■	0.6 → 1.2	0.9 → 1.2	1.6 → 5	0.8/1.0	A 041189	—	9 kW	70 × 34 × 54 / 37.7
MULTIWELD 320T-C	400V 3~	4x 2.5	3	16	40 → 300	40 → 320	200	320 A @ 20%	180	300 A @ 20%	64		■	■	0.6 → 1.2	0.9 → 1.2	1.6 → 6	1.0/1.2	B 046849	—	13 kW	76 × 36 × 54 / 46.2



400 V • 3 ~

MULTIWELD 400T G

400 A

no accessories :
083974

MULTIWELD 400T GW

400 A

no accessories :
091634

WIRE FEEDERS



WF 20

50 W

Ø1.0/1.2 (original equipment)
083981

WF 21

50 W

Ø1.0/1.2 (original equipment)
092648

Connection cable



✓ Multiweld 400T-G

AIR COOLED

5 m 70 mm² 083998

10 m 70 mm² 084001

✓ Multiweld 400T-GW

LIQUID COOLED

5 m 70 mm² 092921

10 m 70 mm² 091641

MIG TORCH 350A
- AIR - 4m - STEEL
(Ø 1.2 mm - M8)
063792MIG/MAG TORCH 500A
- 4m Liquid cooled
(Steel / Ø 1.2 mm / M8)
081147MIG/MAG TORCH 580A
- 4m Liquid cooled
(Steel / Ø 1.2 mm / M8)
091610

	I ₂ MMA	I ₂ MIG	EN60974-1 (40°C)										Ø mm		Original equipment Équipement d'origine Originalausstattung Equipamiento de fabrica				
			MIG	MMA	U ₀ (V)	Electronic Control									200 mm 5 kg	300 mm 15 kg	MIG/MAG (Gas)		
A	A	A	IA (60%)	X% (I2 max)	IA (60%)	X% (I2 max)	U ₀ (V)	Electronic Control	200 mm 5 kg	300 mm 15 kg	MIG/MAG (Gas)	Flux Cored Wire (Gas / No Gas)	Ø mm	MMA		TYPE		Protected & compatible power generator (+/-15%)	L x W x H cm : kg
16	20 → 140	30 → 160	95	160 A @ 20%	90	140 A @ 20%	59		■	■	0.6 → 0.8	0.9	1.6 → 3.2	0.8 (gas) 0.9 (no gas)	A - 046856	0.8	5 kW	79 × 77 × 47 / 30	
16	30 → 180	30 → 200	115	200 A @ 15%	104	200 A @ 15%	65		■	■	0.6 → 1.0	0.9 → 1.0	1.6 → 4	0.8/1.0	A - 041189	0.8	7.5 kW	78 × 37 × 68 / 42.2	
32	30 → 140	30 → 140	110	140 A @ 30%	100	120 A @ 30%	67		■	■	0.6 → 1.2	0.9 → 1.2	1.6 → 5	0.8/1.0	A - 041189	0.8	8 kW	79 × 37 × 67 / 42	
16	30 → 200	30 → 220	160	220 A @ 30%	140	220 A @ 20%	75		■	■	0.6 → 1.2	0.9 → 1.2	1.6 → 5	0.8/1.0	A - 041189	0.8	9 kW	78 × 37 × 68 / 48.1	
16	40 → 250	40 → 250	200	250 A @ 30%	200	250 A @ 30%	59		■	■	0.6 → 1.2	0.9 → 1.2	1.6 → 5	1.0/1.2	B - 046849	—	13 kW	79 × 37 × 67 / 54.2	
16	40 → 300	40 → 320	240	320 A @ 30%	220	300 A @ 30%	64		■	■	0.6 → 1.2	0.9 → 1.2	1.6 → 6	1.0/1.2	B - 046849	—	20 kW	081031 - 96 × 40 × 81 / 74	
32	40 → 400	40 → 400	300	400A @ 35%	300	400 A @ 35%	70		■	■	0.6 → 1.2	0.9 → 1.6	1.6 → 6	1.0/1.2	B - 046849	—	20 kW	90 × 55 × 84 / 55	
32	40 → 400	20 → 400	300	400A @ 35%	320	400 A @ 35%	78	—	—	—	—	—	1.6 → 6	—	—	—	20 kW	90 × 55 × 84 / 55	
32	40 → 400	20 → 400	300	400A @ 35%	320	400 A @ 35%	78	—	—	—	—	—	1.6 → 6	—	—	—	20 kW	69 × 34 × 55 / 17	
—	—	—	500	60%	—	—	—		■	■	0.8 → 1.2	0.9 → 1.6	—	1.0 / 1.2	B - 046849	—	—	—	69 × 34 × 55 / 17



MULTIPEARL

MIG/MAG

INVERTER • SYNERGIC

200 A

**4
in 1**

GAS

NO GAS



Youtube

1 MIG / MANUAL

Enter your parameters



Adjust
Spot
& Delay

NEW

POWER FACTOR CORRECTION
PFC
EN 61000-3-12
FV
FLEXIBLE VOLTAGE



E.MULTIWELD 220-2

200 A

Ø 100/200



P400 PFC FV SR HS AF Anti Sticking
GAS NO GAS MMA TIG



3 m 072145 2.5 m, 16 mm² 2 m, 16 mm²
089938

NEW

POWER FACTOR CORRECTION
PFC
EN 61000-3-12
FV
FLEXIBLE VOLTAGE



E.MULTIWELD 220-4 XL

200 A

Ø 200/300



P400 PFC FV SR HS AF Anti Sticking
GAS NO GAS MMA TIG



3 m 072145 2.5 m, 16 mm² 2 m, 16 mm²
089945

OPTIONS

TIG torch kit SR17V (valve)
4 m
10/25 mm²
087583

TIG torch kit

SR17 DB
4 m
087521

SR26 DB
8 m
087606



**NO GAS WELDING KIT Ø 0.9 - Kit soudage
no gaz Ø 0.9 - Schweißset Fülldraht**

NO GAS

250 A type A 072336 ✓ Multipearl 210-2



250 A type A ✓ Multipearl 210-4 XL ✓ Multipearl 211-4

072336 + 042346 Type A - Ø 0.9 1.0 / 1.2 (x1)

DESIGN IN
FRANCE

MADE IN
GYS CHINA



50 / 60 Hz

E.MULTIWELD 220-2

E.MULTIWELD 220-4 XL

E.MULTIWELD 221-4

110V 1~

230V 1~

110V 1~

230V 1~

2 MIG / SYNERGIC

Easy to use



Select :

Fe	CrNi
AlMg5	CuSi3
AlSi5	AlSi12
CuAl8	F.C.

1. material
 2. Ø wire
 3. position
 4. thickness : 0.5 → 6 mm
- Adjust arc length

3 MMA



HotStart
ArcForce
Electrodes : Ø 1.6 → 5 mm

4 TIG lift



Post Gas
Downslope
Thickness : 0.5 → 8 mm

NEW

POWER FACTOR CORRECTION
PFC
EN 61000-3-12
FV
FLEXIBLE VOLTAGE

2 m
230V 1~

Max 4 m³
(20L)

STORAGE

E.MULTIWELD 221-4

200 A

Ø 200/300


400 GIG

P400 PFC FV SR HS AF Anti Sticking
GAS NO GAS MMA TIG

3 m 072145
089952
2.5 m, 16 mm²
2 m, 16 mm²

PFC POWER FACTOR CORRECTION

185 V ← 265 V




FV FLEXIBLE VOLTAGE

85 V ← 265 V



SR SECONDARY REGULATION



Anti Sticking



	I ₂ MMA	I ₂ TIG	 min + max	EN60974-1 (40°C)		 U _o (V)	 Electronic Control	MIG						 Ø mm	 Ø mm	Original equipment Equipement d'origine Originalausstattung Equipamiento de fabrica			 Protected & compatible power generator (+/-15%)	 L×W ×H cm /kg	 L×W ×H cm /kg
				IA (60%)	X% (I ₂ max)			m/min	100 mm 1 kg	200 mm 5 kg	300 mm 15 kg	MIG:MAG (Gas)	Flux Cored Wire (Gas / No Gas)			MMA		TYPE			
A	A	A	A	IA (60%)	X% (I ₂ max)	U _o (V)	Electronic Control	m/min	100 mm 1 kg	200 mm 5 kg	300 mm 15 kg	MIG:MAG (Gas)	Flux Cored Wire (Gas / No Gas)	MMA		TYPE		Protected & compatible power generator (+/-15%)	L×W ×H cm /kg	L×W ×H cm /kg	
32	10+130	10+160	20+150	100	150 A @ 22%	76		15	■	■	—	0.6+1.0	0.9+1.0	1.6+3.2 1.6+5.0	0.8/1.0	A 041189	0.8/1.0		7.5 kW	51 × 32 × 49 / 20.2	43 × 24 × 31 / 14.8
16	10+200	10+200	20+200	130	200 A @ 20%	75		15	—	■	■	0.6+1.0	0.9+1.0	1.6+3.2 1.6+5.0	0.8/1.0	B 042360	0.8/1.0		7.5 kW	62 × 33 × 57 / 26.9	50 × 27 × 42 / 20.8
32	10+130	10+160	20+150	100	150 A @ 22%	76		15	—	■	■	0.6+1.0	0.9+1.0	1.6+3.2 1.6+5.0	0.8/1.0	B 042360	0.8/1.0		7.5 kW	62 × 33 × 57 / 26.9	50 × 27 × 42 / 20.8
16	10+200	10+200	20+200	130	200 A @ 20%	75		15	—	■	■	0.6+1.0	0.9+1.0	1.6+3.2 1.6+5.0	0.8/1.0	B 042360	0.8/1.0		7.5 kW	79 × 30 × 67 / 38	72 × 27 × 64 / 26.5



CUTTER


PLASMA

25 ▶ 40 A


OPTION COMPASS



Ø max	Trolley included	Torches compatibility		Ref
		TPT 25	TPT 40	
1540 mm	040199	■	■	040205



Included:



PFC POWER FACTOR CORRECTION

FV FLEXIBLE VOLTAGE



POWER FACTOR CORRECTION
PFC
EN 61000-3-12
FV
FLEXIBLE VOLTAGE

NEW
09/2026

INCLUDED:
8 mmDIGITAL
(PRESSURE SENSOR)INCLUDED:
8 mmDIGITAL
(PRESSURE SENSOR)

EASYCUT 25

230 V • 1 ~

25 A

Fe 8 mm
Al/CrNi 6 mmTPT 25, 4 m 068087 2 m, 10 mm²

065543

072046

EASYCUT 40

230 V • 1 ~

40 A

Fe 18 mm
Al/CrNi 15 mmTPT 40, 4 m 901544 2 m, 10 mm²

029743

TPT 40, 4 m 901544 2 m, 10 mm²

902176 3m (Chinese plug)

EASYCUT 40 FV

110 → 230 V • 1 ~

40 A

Fe 18 mm
Al/CrNi 15 mm

P400 PFC FV

TPT 40, 4 m 901544 2 m, 10 mm²

092129

OPTIONS



Torches

		I (60%)	I (100%)	L	Consumables
TPT 25	902299	25 A (30%)	15 A	4 m	Included
TPT 40	901544	40 A	32 A	4 m	



Consumables

		x2	x10	x10	x4	
TPT 25	x1	040175	x3	040168	x3	040212
TPT 40					x1	040236
						Box TPT 25
						Box TPT 40

070721

039957

 CE NORM. MADE IN GYS CHINA EN60974-1			I ₂	 mm				INTEGRATED TECHNOLOGY						AIR SYSTEM			EN 60974-1 (40°C)						 Protected & compatible power generator (+/-15%)
				Coupe max Severance cut		Coupe propre Clean cut		P400	PFC	FV	AD	IP21S	COMPRESSOR	min	ideal	max	I 60%	X% I2 max	100%				
				Fe	Al:CrNi	Fe	Al:CrNi																
EASYCUT 25	230V 1~	16	10+25	8	6	6	4	—	—	—	■	—	2.5 bar	4.5 bar 115 L/min	6.5 bar	15 A	30%	10A	10/25 mm ² Ø 9 mm	15 x 42 x 30	7.5	—	—
EASYCUT 40	230V 1~	16	10+40	20	15	15	10	—	—	—	■	—	2.5 bar	4.5 bar 115 L/min	6.5 bar	10 A	20%	—	10/25 mm ² Ø 9 mm	15 x 42 x 30	8.3	—	—



WELDING ACCESSORIES

ELECTRODES CANISTER

45 cm
Capacity: 7 kg
- 105°C
50 x 12 x 11 cm / 430 g
060258

DRY 5.150

Capacity:
5 kg - 150°C
18 x 21 x 63 cm / 3.2 kg
060685

DRY 10.350R

Capacity:
10 kg - 50>400°C
25 x 24 x 68 cm / 5.5 kg
060708



ELECTRODE HOLDERS

SHARK



for:
PROGYS 200 CEL
PROGYS 200 FV CEL

SHARK X200.35

A	200 A
max	35 mm ²
A (X%)	200A (35%) 150A (60%)
min/max	1.6 > 4 mm
x1 (vrac)	043503
*x1 (blister)	043602
	x 50 043558



for:
PROGYS 250 TRI
PROGYS 300 TRI

SHARK X300.50

A	300 A
max	50 mm ²
A (X%)	300A (35%) 250A (60%)
min/max	1.6 > 5 mm
x1 (vrac)	043510
*x1 (blister)	043701
	x 25 043565



for:
PROGYS 400 TRI

SHARK X500.95

A	500 A
max	95 mm ²
A (X%)	500A (35%) 400A (60%)
min/max	2 > 8 mm
x1 (vrac)	043718C

ELECTRODE HOLDER KITS



A		L (m)	mm ²	mm ²	Ø	ref.
150 / 200	SHARK X200.35	4	16	10 / 25	9	x1 043848C
300	SHARK X300.50	4	35	35 / 50	13	x1 043862C
500	SHARK X500.95	4	50	35 / 50	13	x1 043879C

MMA KITS (ELECTRODE HOLDER + EARTH CLAMP + CABLE/CONNECTORS)

for GYSARC : ✓ 160 / 200
for GYSMI : ✓ 160 A / 200 A / E160
for GYTEC : ✓ 160 LA / 180 LA / 200 LA / E180 PFC



	A	L (m)	model	L (m)	model	mm ²	mm ²	Ø	Ref.
kit 1	150/200 A	1.6	SHARK X200.35	2	CROCO A200.35	16	10 / 25	9	x1 047372
kit 2	200 A	1.6	SHARK X200.35	2	CROCO A200.35	25	10 / 25	9	x1 047389
kit 3	200 A	3	SHARK X300.50	3	CROCO T400.70	25	10 / 25	9	x1 047396
kit 4	200 A	3	SHARK X300.50	3	CROCO T400.70	25	35 / 50	13	x1 047402
kit 7	500 A	3	SHARK X500.95	4	TYREX 600.95	50	35 / 50	13	x1 047419C



TIG TORCHES & CONSUMMABLES



	EN 60974-7	SR 26	
		DB	GRIP
		X% DC	180 A (35%)
		X% AC	130 A (35%)
Ø 35/50 AMPHENOL	4m		072220



Ceramic Gas nozzle



Collet body Support collet



Collet



Back cap

TIG TORCH 26 DB
BOX
901773


x1 x1 x1 x1 x1 x1 x1 x1



TORCHES & CONSUMABLES

WELDING ACCESSORIES

MANUAL TORCHES

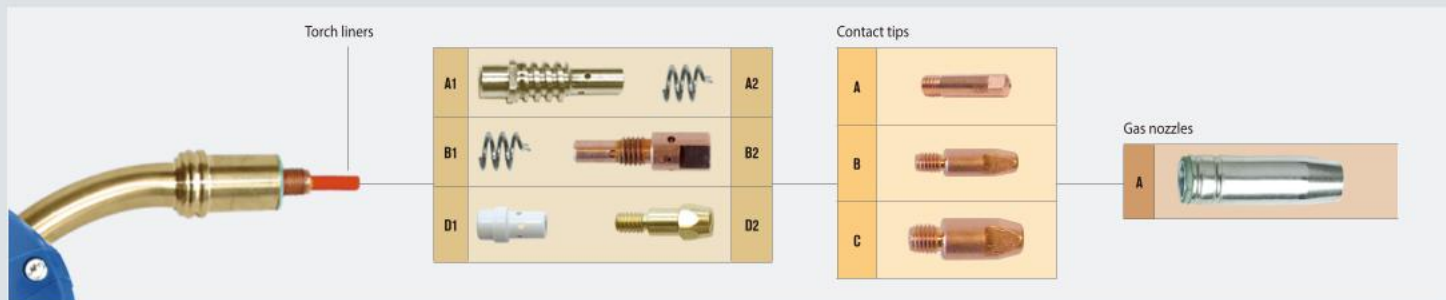

Complete Torches

	STEEL / STAINLESS STEEL					ALUMINIUM			
	AIR			LIQUID		AIR			
	150A	230A	350A	500A	580A	150A	250A	250A	350A
	150A 35%	200A 60%	290A 60%	450A 100%	560A 100%	150A 60%	230A 60%	200A 60%	290A 60%
X% 40°C, Ar/CO ₂	A1+A2		B1+B2		E1+E2	G1+G2	D1+D2		
	M6 Ø 0.8	M6 Ø 1.0	M6 Ø 0.8	M6 Ø 1.0	M8 Ø 1.2	M8 Ø 1.2	M10 Ø 1.2	M6 Ø 0.8	M6 Ø 1.2
	3 m	3 m	3 m	3 m	4 m	4 m	4 m	3 m	3 m
	063754	072121	072145	072152	063792	081147	091610	063761	072138
	3 m	4 m	4 m	4 m	4 m	4 m	4 m	3 m	3 m
	082151	063778	041004	063785	063808				

Torch liners

TEFLON			
Ø 0.6/0.8	3 m	041578	
Ø 0.8/1.0	4 m	044050	
Ø 1.0/1.2	3 m	041585	
Ø 1.0/1.2	4 m	044067	

Pressure-flowmeter 15L/min

Accepts Ø 5 mm and Ø 6 gas pipes 15L/min	
Type of gas: Argon - CO ₂	
041998C	

CO2 Gas heater and regulator

MULTIWELD only AC36V/150W	RH-258, G5/8 CN 063341	GH-258, G3/4 Russia 063358
------------------------------	------------------------------	----------------------------------

Welding wire

Steel			
0.6			
Cored w			
Norms : AWS 5.20 : E71T-GS ; EN ISO 17632-A T42 Z W N 1 H15			
100 mm 1 kg	Ø 0.6	086425	

36V plug inside

Inside MULTIWELD 200/220/250/320/400	
*Only available from GYS China	

Tip adaptors & diffusers

STEEL / STAINLESS STEEL			ALUMINIUM		
AIR			AIR		
150A	250A	350A	150A	250A	350A
A1 (x5)	B1 (x5)	D1 (x5)	A1 (x5)	B1 (x5)	D1 (x5)
042902	042995	043008	042902	042995	043008
A2 (x10)	B2 (x5)	D2 (x5)	A2 (x10)	B2 (x5)	D2 (x5)
042988	042919	042926	042988	042919	042926

Contact tips

	150A	250A	350A	150A	250A	350A
Ø 0.6	A (x10) 041905			—	—	—
Ø 0.8	A (x10) 041912	A (x10) 041950	C (x10) 041790	A (x10) 041059	A (x10) 041059	—
Ø 1.0	—	B (x10) 041967	C (x10) 419803	B (x10) 041066	B (x10) 041066	C (x10) 419766
Ø 1.2	—	B (x10) 041974	B (x10) 419810	—	B (x10) 041073	C (x10) 419773
Ø 1.4	—	—	C (x10) 419827	—	—	—
Ø 1.6	—	—	C (x10) 419834	—	—	C (x10) 041080

Gas nozzles

	150A Ø 12	250A Ø 15	350A Ø 16	150A —	250A Ø 15	350A Ø 16
Conical nozzle	A (x3) 041875	A (x3) 041882	A (x3) 041783	A (x3) 041875	A (x3) 041882	A (x3) 041783

ROLLERS

Type A



Smartmig 142 → 183,
Monogys 200, EasyMig 150 → 180,
Multiweld 160 → 250

Type B



Monogys 250, Trimig,
Multiweld 320 → 400,

Type D



Smartmig 110,
EasyMig 85 → 140

Steel/stainless steel

Ø 0.6/0.8	x1	042339	Ø 0.6/0.8	x2	042353	Ø 0.6/0.8	x1	039483
Ø 0.8/1.0	x1	041189	Ø 0.8/1.0	x2	042360	Ø 0.8 solid	x1	039476
			Ø 1.0/1.2	x2	046849	Ø 0.9/1.0	x1	044081
			Ø 1.2/1.6	x2	042384			

Cored wire (STANDARD V)

Ø 0.8 solid	x1	046856	Ø 0.6/0.9	x1	068940	Ø 0.6/0.9	x1	068926
Ø 0.9 cored			Ø 0.9/1.2	x1	042131	Ø 0.8 solid	x1	039476
Ø 0.9/1.2	x1	042346		x2	042407	Ø 0.9/1.0	x1	044081

Aluminium

Ø 0.8/1.0	x1	041196	Ø 0.8/1.0	x1	042155	Ø 0.8/1.0	x1	039469
Ø 1.0/1.2	x1	062214		x2	042377			
			Ø 1.0/1.2	x1	042186			
				x2	040915			
			Ø 1.2/1.6	x2	042391			

EARTH CLAMPS

27

ACCESSORIES















MMA • TIG • MIG/MAG

CROCO & TYREX

VRAC *



BLISTER **



CROCO A200.35

200 A

35 mm²

200A (35%)

150A (60%)

40 mm

043114

043107

043121

CROCO B300.70

300 A

70 mm²

300 A (35%)

250 A (60%)

70 mm

043138

043145

CROCO M600.95

600 A

95 mm²

600A (35%)

400A (60%)

70 mm

038301

CROCO T300.70

600 A

95 mm²

600A (35%)

500A (60%)

40 mm


043220C

EARTH CLAMP KITS



	A		L (m)	⊙ (mm ²)	⚡ (mm ²)	Ø		Ref.
Cable H07 for Cutting & Welding	250 A	CROCO T300.70	4	25	35 / 50	13	x1	075214
	150 / 200 A	CROCO A200.35	2	16	10 / 25	9	x1	043770C
Cable H01 for Welding only	250 A	CROCO T300.70	3	25	10 / 25	9	x1	043787C
	250 A	CROCO T300.70	4	25	35 / 50	13	x1	043794C
	400 A	CROCO T400.70	4	50	35 / 50	13	x1	047853C

LOCK-GRIP PLIERS

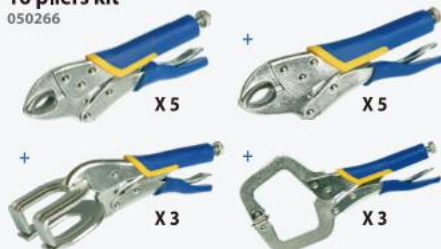16 pliers kit
0502666 pliers kit
050112

CHIPPING HAMMERS



HAMMER 370 PRO

Premium
270 mm / 370 g (x1)
066663

HEAVY DUTY CASES

- Wheeled heavy-duty case XL
9.5 kg64 x 52 x 31 cm / 10.6 kg
077461for PROGYS :
✓ 200 CEL
✓ 220 FV CEL
✓ 250 TRIfor PROTIG :
✓ 200 DC
✓ 250 DC TRI
✓ 200 AC:DC
✓ 230 AC:DC✓ EASYCUT 25
✓ EASYCUT 40



WELDING ACCESSORIES

PROTECTION KITS



070493
Starter welding kit

MULTI-USE LEATHER APRON



045217

FLAME WELDING



Shade/IR5
042858

PROTECTION GOGGLES



Shade/IR0
042810



Shade/IR0
042827



Shade/IR0
042865

WELDING GLOVES

TIG



PRO
Gants PRO TIG EXTRA - T10
045323



EN 407
41313X
EN12477-B
EN 420

MMA - MIG/MAG



BASIC
Heavy Duty - T10
(MMA - MIG - Plasma)
045101



EN 407
423X4X
EN12477
Class : A1




PRO
Reinforced welding gloves - T10
045873

WELDING SLEEVES



045231

WIRE BRUSHES

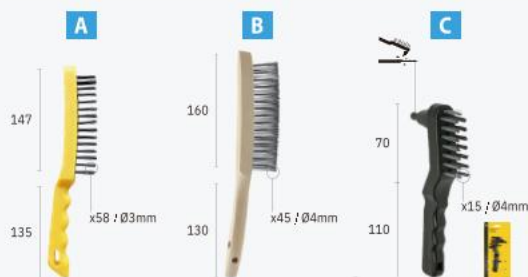

			Steel	Stainless
A		—	(x1) 044241 (x24) 044265	(x1) 044258 (x24) 044272
B		—	(x1) 044227	(x1) 044289
C		•	(x1) 044166	—

SPECIAL WELDING MAGNET



MAGNETIC P15.90 MAGNETIC P16.90 MAGNETIC P19.90 MAGNETIC P20.180 MAGNETIC D30.90 MAGNETIC D50.90 DUAL MAGNETIC D50.90 MAGNETIC D70.90M MAGNETIC D70.120M MAGNETIC D70.135M

	Classic				Switchable ON/OFF					
U max	15 kg	16 kg	19 kg	20 kg	30 kg	50 kg	50 kg	60 kg	60 kg	60 kg
	60/90°	45/90/135°	45/90/135°	articulated 0 > 180°	45/90/135°	90°	90°	90°	45/60/75/ 90/105/135°	45/75/ 90/105/135°
x	2	4	1	1	1	1	1	1	1	1
	100 x 73 x 12	45 x 32 x 28	156 x 102 x 20	204 x 86 x 28	111 x 95 x 25	148 x 148 x 38	71 x 60 x 48	48 x 32 x 70	111 x 55 x 80	99 x 55 x 80
Ref.	047044	044180	044203	044302	044197	047051	047075	047068	047082	047099



A black and blue racing helmet with a digital display on the visor, next to its retail box. The helmet features a blue flame-like pattern on the side and a small digital screen integrated into the visor area. The box is white with blue and yellow accents, showing the helmet and the brand name 'Spartan'.

PROMAX 3/5-13 G VOLCANO
037205

 **100 × 50 mm**  →  **0.08 ms**

ULTRA CLEAR 3 (1000) x4 1000+ 1000 GRIND TRUECOLOR

ULTRA CLEAR 3 $\left(\begin{smallmatrix} (10 \text{ ft}) \\ (10 \text{ m}) \end{smallmatrix}\right) \times 4$  +   GRIND TRUECOLOR

AUTOMATIC
SHADE 5-13 XL





ERGOTECH + 5-9/9-13 G SILVER
068650

 100 × 67 mm → **0.08 ms**

CLEAR 4 $\begin{pmatrix} (10 \dots) \\ (10 \dots) \end{pmatrix} \times 4$ **+** **GRIND** **TRUECOLOR**

1/1/1/1 **ULTRA CLEAR 3** ((.))x4 + **GRIND** **TRUECOLOR**

		TRUE COLOR		0.08 ms		HF		DELAY		1/1/1/2		4		100x50 mm		Multi Premium		L × W × H cm : g		540
FIREMAN 3/5-13 G	3 - 5>9 / 9>13		0.08 ms	—	0.15 > 0.8 s	1/1/1/2	4	100x50 mm		—	☀ + 2 (CR 2032)	Multi Premium	26 × 24 × 27 : 820	540						
PROMAX 3/5-13 G	3 - 5>9 / 9>13		0.08 ms	—	0.15 > 0.8 s	1/1/1/2	4	100x50 mm		—	☀ + 2 (CR 2032)	Multi Premium	26 × 24 × 27 : 840	540						
ZEUS 4/5-13 G	4 - 5>9 / 9>13		0.08 ms	—	0.15 > 0.8 s	1/1/1/2	4	XL : 100x67 mm		✓	☀ + 2 (CR 2450)	Multi	26 × 24 × 27 : 900	510						
ERGOTECH + 3/5-13 G	3 - 5>9 / 9>13		0.08 ms	✓	0.15 > 0.8 s	1/1/1/1	4 HIGH SENSITIVITY	XL : 100x67 mm		✓	☀ + 2 (CR 2032)	Multi Premium	26 × 24 × 27 : 1000	520						

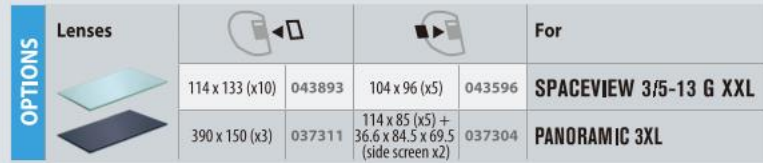

Fixed shade 5 3-5-9,9-13 Adjustable Fixed shade 5

		TRUE COLOR			HF		DELAY										
SPACEVIEW 3/5-13 G XXL	3-5>9/9>13	■	0.08 ms	✓	0.15 > 0.8 s	1/1/1/1	4 HIGH SENSITIVITY	XXL : 100x93 mm	■	✓	☀ + 2 🔋 (CR 2032)	Multi Premium	26 × 24 × 27 / 1000	540			
APOLLO+ 3/5-13 G	3-5>9/9>13 + 2x:5	■	0.08 ms	✓	0.15 > 0.8 s	1/1/1/1	4 HIGH SENSITIVITY	XL : 100x67 mm + 2x 87x102 mm	■	✓	☀ + 2 🔋 (CR 2032)	Multi Premium	26 × 24 × 27 / 1000	550			
PANORAMIC 3XL	3-4>8/8>12 + 2x:3>10	■	0.04 ms	✓	0.15 > 0.8 s	1/1/1/1	4 HIGH SENSITIVITY	114x85 mm + 2x(68x80) mm	■	✓	☀ + 2 🔋 (CR 2450)	Multi Premium	23.6 × 24.6 × 34.8 / 1140	550			




AUTOGYS

MIG/MAG TRADITIONAL SYNERGIC

Capacitor

> PERFECT WELD



CARMIG

15 $\blacktriangle$ 200 A

400 V • 3 ~ 3m

with accessories
032132



400 V • 3 ~ 3m (No plug)

with accessories
902336



4m³
(20L)



MIG-MAG GMAW-FCAW

TRADITIONAL

CRMIG / GYS AUTO

31

INVERTER

CARMIG-E AUTO

32

ACCESSORIES & CONSUMABLES

26

MADE IN GYS CHINA 			 min → max
	50/60 Hz	A	A
CARMIG	400 V 3~	10	15 → 200
M1 GYS AUTO	230 V 1~	16	15 → 160
T1 GYS AUTO	400 V 3~	16	15 → 200
CARMIG-E AUTO	230 V 1~	16	20 → 200

SYNERGIC - EASY TO USE

Auto adaptative wire speed

OPTIONS

Option
Spool Gun Torch
041486

Ø 100
Ideal for
- Steel / Acier / Stahl
- Stainless steel / Inox
- Alu

M1 GYS AUTO

15 **160 A**

Capacitor

230 V • 1 ~

with accessories
032903

T1 GYS AUTO

15 **200 A**

Capacitor

400 V • 3 ~

with accessories
032910

220 V • 3 ~

with accessories
901964

200 V • 3 ~

with accessories
900813



for
M1 GYS AUTO
T1 GYS AUTO

Steel
3m, 180A
063754

OPTIONS

Alu TORCH

250 A
3 m
air
063761



CARMIG E AUTO



33

MIG/MAG INVERTER



CARMIG-E AUTO

20 **200 A**

230 • 1 ~

with accessories:
087675

3 m, 25 mm²
Steel
150 A, 3 m, air
063754
Ø 0.6

NEW



AUTO GYS

TRADITIONAL SYNERGIC

	 Ø mm					EN60974-1 (40°C)		 Ø mm	Original equipment Équipement d'origine Originalausstattung Equipamiento de fabrica			 
Reg	100 (spoolgun)	200	300	Electronic Control	IA (60%)	X% (I2 max)	Steel	Alu			LxWxH cm / kg	Protected & compatible power generator (+/-15%)
7	—	■	■		110	150A@25%	0.6+1	—	0.6/0.8	0.8	77 x 47 x 79 / 50	5 kVA
6	option	■	■		90	140A@15%	0.6+1	—	0.6/0.8	0.8	78 x 38 x 67 / 56	4,5 kVA
7	option	■	■		110	150A@25%	0.6+1	—	0.6/0.8	0.8	78 x 38 x 67 / 56	4,5 kVA
—	—	■	■		120	200A@15%	0.6+1	0.8+1.0	0.6/0.8	0.8	78 x 38 x 67 / 42	4,5 kVA



GYSPOT ALU

DENT PULLING ALUMINUM

66 mF

CAPACITOR
DISCHARGE
WELDING



AD ANTI-DUST



SYNERGIC CONTROL

PATENTS REGISTERED NUMBERS
EUROPEAN TRADEMARK & DESIGN



Studs

NEW



FIXED GUN

GYSPOT ALU 66

13000 A x1 AUTOMATIC

230V • 1 ~

AD

080188

200 V • 2 ~



901865

6 m

included

for Ø 4 mm



Automatic alu gun
3 m, 25 mm²

+



ALU BOX STANDARD (050020)

ALU GUN



PATENTS REGISTERED NUMBERS
EUROPEAN TRADEMARK & DESIGN



Set of 2 M4 stud holders
049000C x2

Joint rings for mandrel Ø 4/5,6
x2
060814

GYSPOT ALU 66 FV

13000 A x1 AUTOMATIC

230V • 1 ~

FV AD

091450

included

for Ø 4 mm



Automatic alu gun
3 m, 25 mm²

+



ALU BOX STANDARD (050020)

OPTIONS

Universal 800
for ALU 66
051331



Alu Puller
051003

=



+ Alu 1
050938

+ Alu 2
050945



ALU BOX STANDARD
050020



included GYSPOT
ALU 66

x 200



alu magnesium screws
12 mm - ø 4 - M4
050273

x 200



alu silicium screws
12 mm - ø 4 - M4
050280

x 5



screwable rings - ø 4
050297

x 1



lifting rod
180 mm

DENT PULLING ALU+STEEL

 PATENTS REGISTERED NUMBERS
EUROPEAN TRADEMARK & DESIGN

Steel / Acier / Stahl

Alu



- Stars
- Rings
- Wavy wires
- Impact shrinking
- Tempering
- Rivets
- Rings
- Studs

NEW



GUN WITH CONNECTOR

GYSPT COMBI PRO 230



3800 A Acier / Steel / Stahl

13000 A Alu

230 V · 1 ~



AUTOMATIC

MANUAL

AUTOMATIC

087705

included



Manual quick gun, 2 m, 70 mm² (057524)
+ Hammer (057272)



Automatic alu gun, 3 m, 25 mm²



Earth cable
2 m, 70 mm



ALU BOX STANDARD (050020)
(Details p.10)

MADE IN GYS CHINA				I_2 max	U_2		RMS	kW				SYNERGIC					SEPARATE CABLE GUN			
		50/60 Hz		A	V	A	A		OK	OK	MANUAL		—	—	x 1	—		—	3 m	
GYSPOT ALU 66		230 V	6 m	13 000	50 200	5	—	0.52	OK	OK	■	■	—	■	x 1	—	—	3 m	Included Alu box	27 x 20.5 x 27 ; 13.5
GYSPOT ALU 66 FV		110 230 V	6 m	13 000	50 200	5	—	0.52	OK	OK	■	■	—	■	x 1	—	—	3 m	Included Alu box	27 x 20.5 x 27 ; 13.5
GYSPOT COMBI PRO 230		230 V	8 m	3800 (steel) 13000 (alu)	7.4 (steel) 50 x 200 (alu)	16	2800 (steel)	20	OK	OK	—	■	■	■	x 1	x 1	■	2/3 m	Included Spotter box + Alu box	54 x 76 x 34 ; 43.8



GYSPOT

DENT PULLING STEEL

- Stars
- Rings
- Wavy wires
- Impact shrinking

OPTIONS

Consumables
p.28




Trolleys
p.30



- Stars
- Rings
- Wavy wires
- Impact shrinking

Tempering



FIXED GUN



FIXED GUN

GYSPOT 2602

2600 A

✂ x1 AUTOMATIC

230 V • 1 ~

052208

included



Automatic quick gun, 1.8 m, 70 mm²
+ Hammer (057272)



Earth cable 1.7 m, 50 mm² + Electrode warming point + Star copper coating (x3)

GYSPOT 2702

2600 A

✂ x1 MANUAL

230 V • 1 ~

055353

200 V • 2 ~



900820

included



Manual quick gun, 1.8 m, 70 mm² (058705)
+ Hammer (057272)



Earth cable 1.7 m, 50 mm² + Electrode warming point + Star copper coating (x3)

GYSPOT 34.02 & 34.04

3500 A

✂ x1 MANUAL

230 V • 1 ~

GYSPOT 34.02
065741

200 V • 2 ~

GYSPOT 34.02
901828
901285

400 V • 2 ~

GYSPOT 34.04
067943

included



Manual quick gun, 2 m, 50 mm²
+ Hammer (057272)



Earth cable 1.7 m, 50 mm² + Electrode warming point + Star copper coating (x3)

400 V • 2 ~

GYSPOT 34.04 APAC
901315

included



Manual quick gun, 2 m, 50 mm²
+ Hammer (057272)



QUICK GUNS

⌚ Quick & Easy



PATENTS REGISTERED NUMBERS
GOLDENAS 3001
EUROPEAN TRADEMARK & DESIGN



AUTOMATIC



WITH CONNECTOR
2 m, Ø 70 mm²
included PRO 230/400
057517



WITH CONNECTOR
3 m, Ø 50 mm²
included PRO 230/400
057500



MANUAL



WITH CONNECTOR
cable 2 m, Ø 70 mm²
included PRO 230/400,
057524

No connector
cable 1.8 m, Ø 70 mm²
for 2702
058705

No connector
cable 2 m, Ø 50 mm²
for 34.02/34.04

- Stars
- Rings
- Wavy wires
- Impact shrinking
- Tempering
- Rivets
- Rings
- Studs

SYNERGIC CONTROL

PATENTS REGISTERED NUMBERS
EUROPEAN TRADEMARK & DESIGN



GUN WITH CONNECTOR

GYSPOT 39.02D, 39.02 & 39.04D, 39.04

3800 A

x1 AUTOMATIC

230 V • 1 ~	GYSPOT 39.02 052215	GYSPOT 39.02D 090613	NEW
400 V • 2 ~	GYSPOT 39.04 052222	GYSPOT 39.04D 090620	NEW

included




GYSPOT PRO 230D, 230 & 400D, 400

3800 A

x2 **AUTOMATIC**
MANUAL

230 V • 1 ~	GYSPOT PRO 230 052178	GYSPOT PRO 230D 090637	NEW
400 V • 2 ~	GYSPOT PRO 400 052185	GYSPOT PRO 400D 090644	NEW

included



				$I_2 \text{ max}$	U_2		I_{RMS}	kW				SYNERGIC				AUTOMATIC	MANUAL	SEPARATE CABLE GUN		
MADE IN GYS CHINA	62135	50 60 Hz		A	V	A	A		OK	—	■	—	—	—	—	■	—	—	20 x 32 x 18	15
	GYSPOT 2600	230 V	2 m	2600	5,4	16	1800	10	OK	—	■	—	■	—	—	■	—	—	20 x 32 x 18	14.5
	GYSPOT 2700	230 V	2 m	2600	5,4	16	1800	10	OK	—	■	—	■	—	—	■	—	—	20 x 32 x 18	14.5
	GYSPOT 34.02	230 V	2 m	3500	7,4	16	2500	20	OK	OK	■	—	■	■	—	■	—	—	22,5 x 36 x 23,5	21
	GYSPOT 34.04	400 V, 2ph	4 m	3500	7,4	16	2500	20	OK	OK	■	—	■	■	—	■	—	—	22,5 x 36 x 23,5	21
	GYSPOT 39.02	230 V	4 m	3800	7,4	16	2800	20	OK	OK	—	■	■	■	■	—	■	—	22,5 x 36 x 23,5	22
	GYSPOT 39.04	400 V, 2ph	4 m	3800	7,4	16	2800	20	OK	OK	—	■	■	■	■	—	■	—	22,5 x 36 x 23,5	22
	GYSPOT PRO 230	230 V	8 m	3800	7,4	16	2800	20	OK	OK	—	■	■	■	■	■	■	—	22,5 x 36 x 23,5	20.5
	GYSPOT PRO 400	400 V, 2ph	8 m	3800	7,4	16	2800	20	OK	OK	—	■	■	■	■	■	■	—	22,5 x 36 x 23,5	20.5



GYSPOT ACCESSORIES & CONSUMABLES



DENT BOX CONSUMABLES / BAR / EASY
SPOTTER BOX STANDARD / 2600 / 2700



SPOTTER BOX PRO

DENT BOX

CONSUMABLES

051515

BAR
050037

EASY
053632

SPOTTER BOX

PRO
050075

STANDARD
053915

2600
052277

2700
053922

hexagon



x1

Earth plate
small



x1

chuck for
inertia
hammer



x1

049482

x1

copper
coating
star



x20

052239

x20

x20

x20

x20

x20

x20

electrode
ø 16
for 8 x 16



x1

049574

x1

x1

x1

x1

x1

ø 8 x 16



x100

049444

x50

x50

x50

x50

x50

earth hook



x1

056718

x1

x1

x1

x1

x1

carbon
heating
electrode



x5

049468

x1

x1

x1

x1

electrode
warming
point ø 16



x1

049567

x1

x1

x1

electrode



x1

049789

x1

x1

wavy
wire



x50

049727

x25

x25

x25

elec-
trode



x1

050655

x1

x1

straight
rings



x100

050648

x50

x50

x50

twisted
rings



x50

050631

x25

lifting rod



x3

180, 300,
050792

x1

x1

180 mm
180 mm

electrode for
threaded studs
rivets ø 5 - M5, M6



x1

049598

x1

threaded
M5 x 18
x 0.8



x100

049383

x50

ø 5 x 18
self-threading



x100

049420

x50

ø 5 x 12



x100

049413

x50

electrode
ø 16, 3 x
4,50



x1

049604

x1

ø 3 x 3,25



x100

049345

x100

ø 3 x 4,5



x100

049352

x100

Star



Ring



Tempering



Impact shrinking



Wavy wire



Rings



Studs



Rivets



Rubber pad
062399

MAGNETIC EARTH (x1)
049666



ELECTRODE FOR
MAGNETIC EARTH (x1)
050013



THREADED ROD FOR
MAGNETIC EARTH (x5)
055438



Lifting rods 180, 300 & 500 mm
050792

Mandrels for gun
for dent pullers

QUICK GUN
057531



D1
048959





FAST DENT PULLING

Box of 3 electrodes for accessories
050822



STEEL

EASY TOOL CONNECTION



051690



MANUSPOT = 050679



Tools set & support
for DENT 600, 800, 1000, 1600,
Workstation & Dentstation

+ EASYGUN 051317



MANULINER 050471



PATENTS REGISTERED NUMBERS
001652108-0003
EUROPEAN TRADEMARK & DESIGN

MANULINER/GUN 056831



Gun adapter
included
052499



PATENTS REGISTERED NUMBERS
001652108-0003
EUROPEAN TRADEMARK & DESIGN



Direct impact electrodes (x5)
050839

Patins - Pads (x2)
060807

SLIDE HAMMERS

COMPLETE 057272



1,1 kg
049802

(x1) 054028
Options
(x5) 050839

included (x1) 049482
included (x20) 052239


5 kg **NEW**
+ 6 hooks
087828

9 kg **NEW**
+ 6 hooks
085930



73 cm

GRIPPING HOOK HEAD



1,7 kg
051201

Washers
8x16 (x100) 049444
Ø 16, 8x16 (x1) 049574
(x1) 051218

HYDRAULIC CYLINDER KIT

BASIC 4T 052345



BASIC 10T 052338



FAST & EASY TOOLS
LEVELLING BARS

DENT PULLING




PULLING BARS

OPTIONS

Reinforced bar 1200 mm

051171

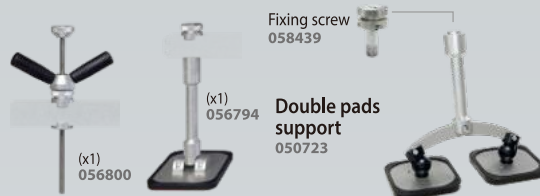

STANDARD



1 tooth hook
Ø M10 / M14
082021

3 teeth hook
PREMIUM
Ø M10 / M14
059658

STANDARD



4 tooth claw
Ø M10 / M14
049758

6 tooth claw
Ø M10 / M14
049734


8 tooth claw
Ø M10 / M14
049741

STANDARD

Levelling lever

050686

↕ 1.6 kg
⊗ 79 x 12 x 17 cm / 1.9 kg

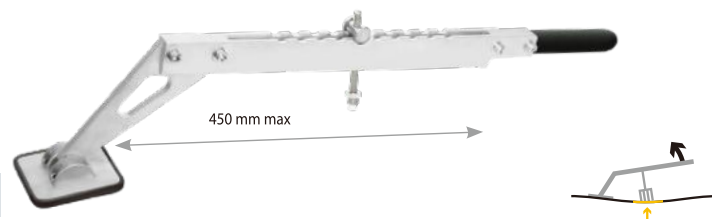


Double action levelling bar

053564

↕ 2.5 kg
⊗ 77 x 12 x 13 cm / 3.2 kg

Licensed by
BETAG.Innovation

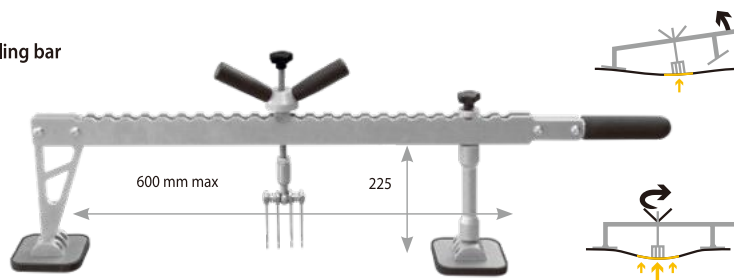

Levelling bar

NEW
06 2026

050693

↕ 3.4 kg
⊗ 87 x 17 x 19 cm / 4 kg

Licensed by
BETAG.Innovation




Reinforced scissoring bar

NEW
06 2026

050716

↕ 5.1 kg
⊗ 87 x 17 x 18 cm / 5.9 kg

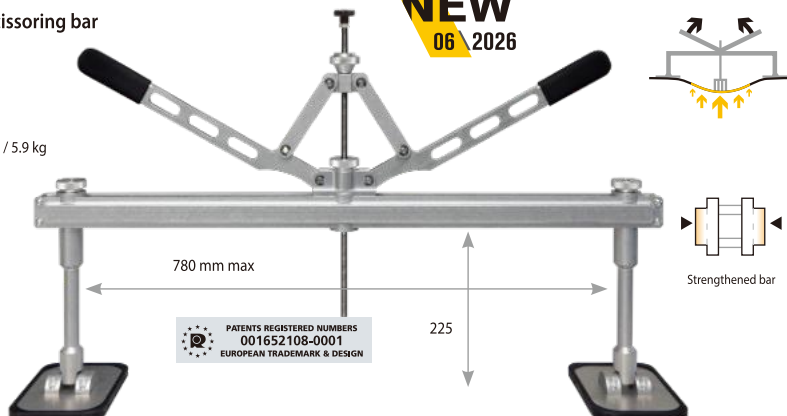



GLUE PULLING REPAIR



41

GLUE PULLING REPAIR

DENT PULLING

GYS GLUE PULLING REPAIR KITS

085770

NEW

111 pcs



Glue sticks
x 10
085183
x 30
087835

NEW



250 mm



6 rectangular red end tabs
085312



10 flat pink end tabs
085329




4 green domed end tabs
085398




12 black multiform tabs
085978




2 blue bars with 4 plastic rings
085251



3 tabs with 14 plastic rings kit
085282



4 blue pull bars with metal rail
085299



10 blue multiform pulling bars
085305



Tapping hammer
085411



Dent removal aluminium pen
085404



Dent removal clamp
085435



400 W hot glue gun



Rubber mallet
085428



Inertia hammer 200 g
085459



Pulling handle
085442



Plastic wedge



Spray bottle 600 ml



20 glue sticks
085183

GPR WORKSTATION



GYS GPR KIT
085770

111 pcs



Workstation Premium
076143



Infrared thermometer
079922



30 glue sticks
087835



Heat gun
066311



Double action levelling bar
053564

Included
4 tooth claw
049758



Alu puller
051003

Included
Alu 1
050938
Alu 2
050945



Slide hammer 1.7kg
051201



Dent repair lamp
083936



DENT PULLING WORKSTATIONS

Compatibility

SPOT	Dent 600	Dent 1000	Universal 800	Weld 10m³	Spot 1600	Dent 1600	Dentstation Pro
26.02 / 27.02	✓	✓	✓	✓	✓	✓	✓
34.02 / 34.02	✓	✓	✓	✓	✓	✓	✓
39.02 / 39.02	✓	✓	✓	✓	✓	✓	✓
PRO 230 / PRO 400	✓	✓	✓	✓	✓	✓	✓

Dent 600

60 x 14 x 39 cm / 7,4 kg
072831




Dent 1000

60 x 14 x 39 cm / 9,9 kg
072848




Universal 800

52 x 15 x 80 cm / 18,1 kg
051331

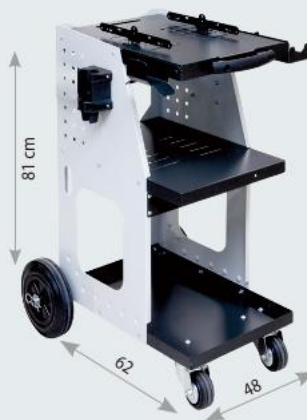

Weld 50L

52 x 15 x 80 cm, 28,5 kg
901728

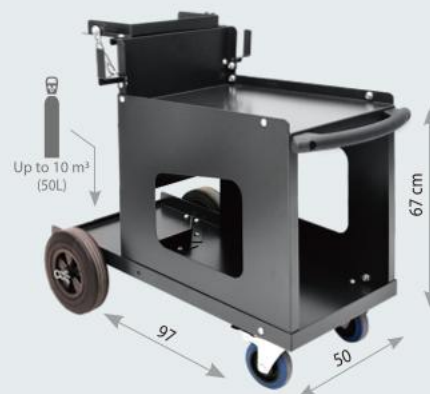

Spot 1600

97.5 x 18.5 x 63 cm, 18,1 kg
051348




Dent 1600

103 x 22 x 66 cm, 52,4 kg
072596



Dentstation PRO

81 x 29 x 61 cm, 58 kg
056848

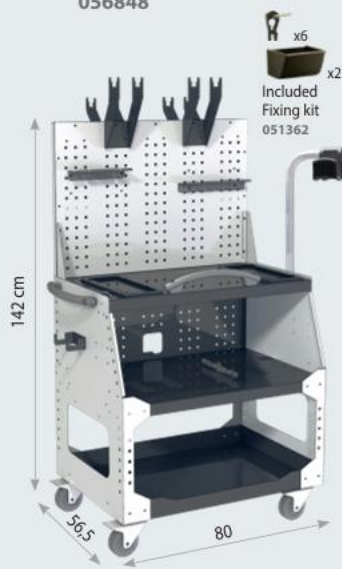

OPTIONS



Cable support
for Spot 800, 1600
& Dentstation
052284



4 m³ support
for Spot 1600 &
Dentstation Pro
059665



Protection cover
for Universal 800
062733
for Spot 1600
048881
for Dentstation Pro
059870

EASYLINER



EASYLINER 39.02
EASYLINER 39.02D

EASYLINER PRO 230

PROLINER



PROLINER 39.02
PROLINER 39.04

PROLINER PRO 230
PROLINER PRO 400

PROLINER ALU 66

STEEL



GYSPOT
(guns & consumables included)

39.02	053618C	PRO 230
39.02D	091764	601239



INCLUDED ACCESSORIES



DENT 1000
072848



Dent box easy
053632



Levelling bar double action
053564

STEEL



GYSPOT
(guns & consumables included)

39.02	PRO 230
601246	601260
39.04	PRO 400
601253	601277

INCLUDED ACCESSORIES



UNIVERSAL 800
051331
+ Cable support
052284



Dent box bar
050037



Levelling bar double action
053564

ALU



GYSPOT
(guns & consumables included)

ALU 66
601345

INCLUDED ACCESSORIES



UNIVERSAL 800
051331
+ Cable support
052284



Alu puller
051003

SPEEDLINER STANDARD



39.02, 39.04



PRO 230, 400



COMBI 230 E.PRO



ALU 66
+ 39.02, 39.04



ALU 66
+ PRO 230, 400



ALU 66

★ ★ ★
COMPLETE
SYSTEM



STEEL



GYSPOT
(guns & consumables included)

39.02	601154
39.04	601161
PRO 230	601178
PRO 400	601185

ALU + STEEL



GYSPOT
(guns & consumables included)

COMBI PRO 230

601819

NEW



GYSPOT
(guns & consumables included)

ALU 66 + 39.02	601758
ALU 66 + 39.04	601765
ALU 66 + PRO 230	601772
ALU 66 + PRO 400	601789

ALU




GYSPOT
(guns & consumables included)

ALU 66	601796
--------	--------

INCLUDED ACCESSORIES



Spot 1600
051348

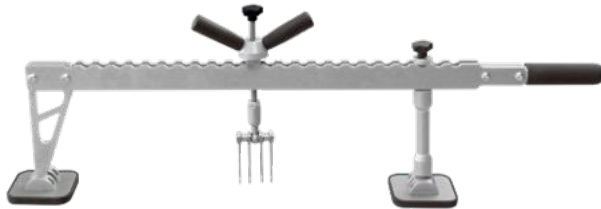

Levelling bar double action
053564



6 gripping multihook head
049734



3 lifting rods
050792



Magnetic earth
049666



Manuspot
050679



Dent box consumables
051515

+



Alu puller
051003

Cable support
052284

+




Alu puller
051003

Cable support
052284

INCLUDED ACCESSORIES



Spot 1600
051348



Levelling bar double action
053564



Alu puller
051003



Stainlesssteel brush
044258

DENTSTATION STANDARD

NEW

COMPLETE
SYSTEM



39.02, 39.04



PRO 230, 400



COMBI PRO 230



ALU 66
+ 39.02, 39.04



ALU 66
+ PRO 230, 400



STEEL



GYSPOT
(guns & consumables included)

39.02	601192
39.04	601208
PRO 230	601215
PRO 400	601222

ALU + STEEL



GYSPOT
(guns & consumables included)

COMBI PRO 230

601826

NEW



GYSPOT
(guns & consumables included)

ALU 66 + 39.02	601833
ALU 66 + 39.04	601840
ALU 66 + PRO 230	601857
ALU 66 + PRO 400	601864

INCLUDED ACCESSORIES

Fixing kit 051362


x6 x2



Dentstation Pro + Fixing kit
056848 051362



Manuspot
050679

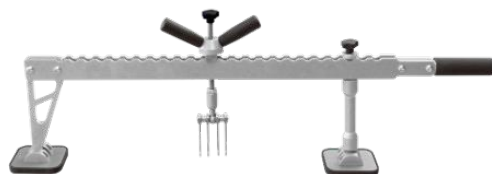

Levelling bar double action
053564



6 gripping multihook head
049734




8 gripping multihook head
049741



Magnetic earth
049666



Dent box consumables
051515



3 lifting rods
050792



Manual pulling handle
057289

+



Alu puller 051003 Cable support 052284

+



Alu puller 051003 Cable support 052284

CONTOUR GAUGES

052840



057265



LIP PLIER

079649



LOCK-GRIP PLIERS

Flat nose - 460 mm
050112



KIT :
050266



FRAMES SUPPORT



Adjustable catenary



Protecting foam



Non-slip base

040601

↓ 105 x 33 x 9 cm / 6.3 kg
⊗ 107 x 35 x 10 cm / 6.7 kg



040250

↓ 100 x 105 cm - 7.1 kg
⊗ 104 x 10 x 32 cm / 7.5 kg



083875

14.4 kg
⊗ 108 x 9 x 47 cm / 16.5 kg



040311

↓ 106 x 31 x 6 cm / 6.6 kg
⊗ 106 x 31 x 11 cm / 9.7 kg



040304


↓ 105 x 109 cm / 7.2 kg
⊗ 107 x 32 x 10 cm / 7.8 kg



WHEELS PAINTING SUPPORT


082168

⊗ 83 x 45 x 35 cm : 25 kg

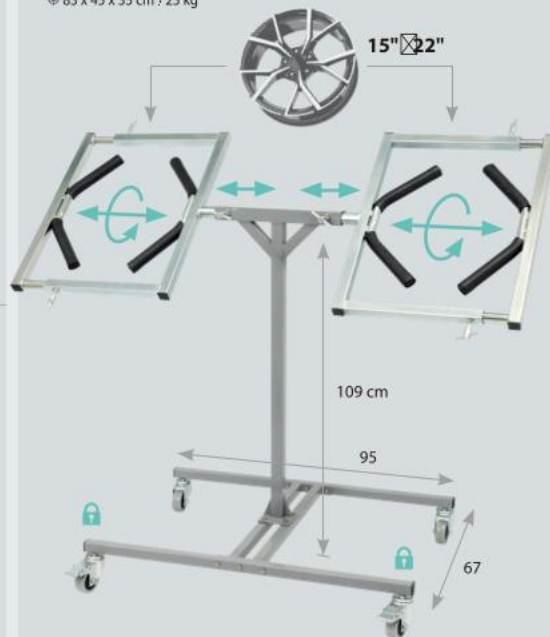

TELESCOPIC FRAMES SUPPORT

083882

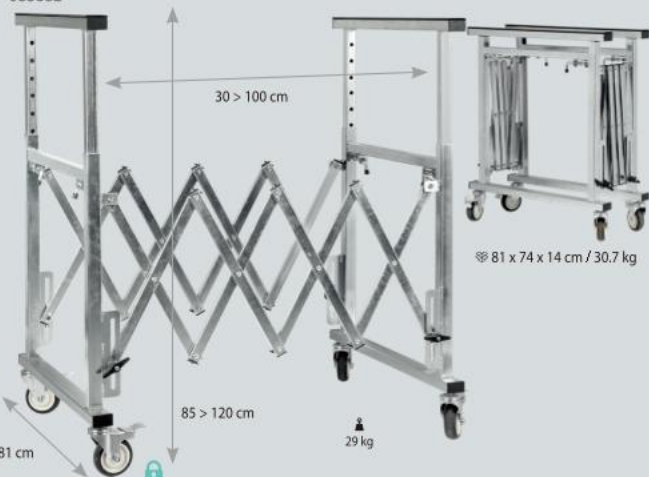

ROTARY ELEMENT SUPPORT

052376

↓ 50 x 70 x 10 cm / 7.3 kg
⊗ 60 x 77 x 12 cm / 8.3 kg



ROTARY ELEMENT SUPPORT

052611

200 x 101 cm - 19 kg
⊗ 112 x 35 x 13 cm / 23 kg



STORAGE TROLLEY

040243
71 x 90 x 197 cm
41 kg
⊗ x2: 90 x 6 x 147 cm
+ 97 x 74 x 24 cm




059825



106 x 104 x 215 cm - 32.5 kg
112 x 31.5 x 21.5 cm
+ 12 x 9.5 x 194.5 cm

059832

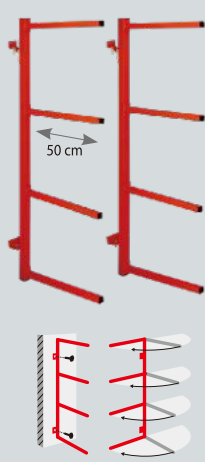

↓ 50 x 150 cm - 11.3 kg
⊗ 155 x 18 x 12 cm / 13.8 kg

GRATE LIFTER TROLLEY

089068



115 cm

65 cm

53.5 cm

UNIVERSAL SUPPORT

083868
56 kg
⊗ 102 x 72 x 27 cm / 59 kg

NEW



PLASTIC WELDING STATION



320 W - 230 V, 1~50 Hz
Temperature: 160 < 480°C
▲ 3.4 kg
Length of hose: 1 m
Air flow: 24 l/min




Youtube

Station only
064072



FOLDING STEP STOOLS


080041
7.3 kg
⊗ 100 x 39.5 x 19 cm / 8.1 kg

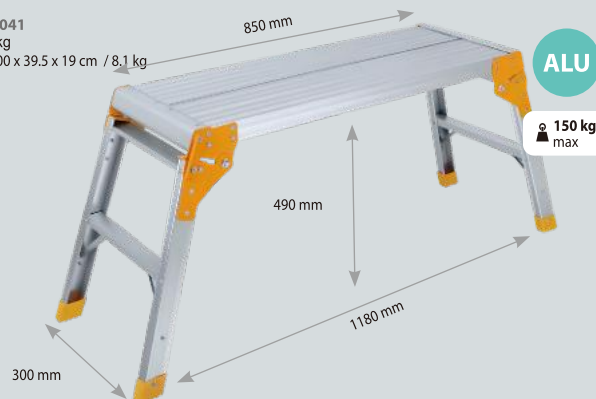

ALU

150 kg max


057562
7.9 kg
⊗ 102 x 39 x 19 cm / 8.5 kg

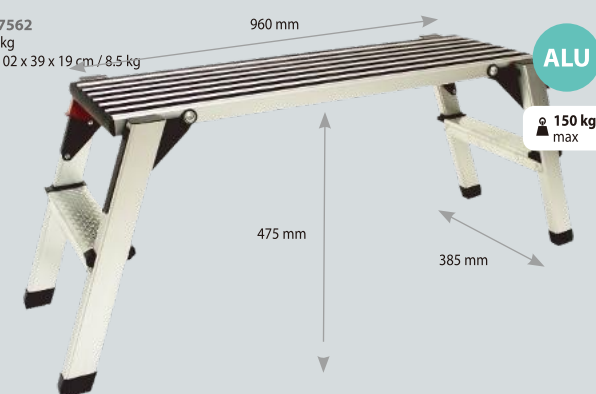

ALU

150 kg max

058552
↓ 113 x 41 x 16 cm / 16 kg
⊗ 117 x 42 x 17 cm / 17 kg

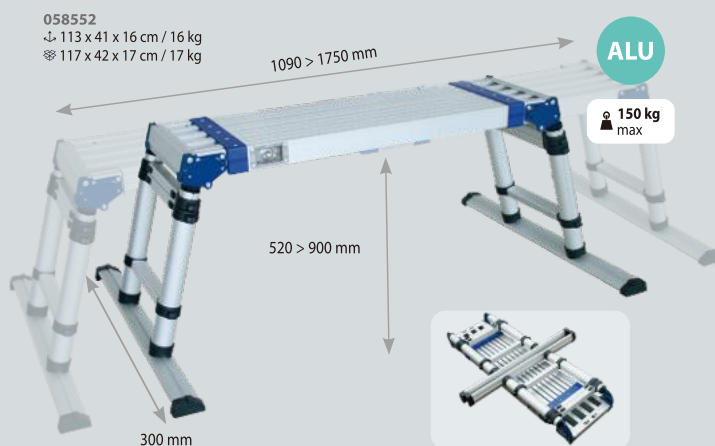

ALU

150 kg max

FILM COATING THICKNESS GAUGE

059856

Measurement range : 0 - 1.80mm
Resolution : 0.01mm / 1mm
Measurement error : ± 0.03 mm
Power Supply : 2x 1.5V AAA batteries (included)
Overall dimensions : 62 x 30.5 x 105 mm



ROUND STOOL WITH TOOL STORAGE

057555
38 x 38 x 44 cm - 5.2 kg
⊗ 41 x 19 x 41 cm / 5.6 kg



max : 50 cm
min : 38 cm



PLASTIC STOOL WITH TOOL STORAGE

085916
3.9 kg
⊗ 61 x 36 x 16 cm / 4.6 kg

NEW



HAND LAMPS

PORTABLE HAND LAMP 400 L 400 lumens

COB LED
Li-ion
Charging time : 8h
operating time
High position : 2.5 h
Low position : 5 h
Top light (1 W) : 6 h

↕ 7 x 4 x 23 cm / 0.3 kg
⊗ 14 x 7 x 24 cm / 0.5 kg

059153



UNDER BONNET LAMPS

UNDER BONNET LAMP AND TRIPOD 800 L 250-800 lumens

120 COB LED
3.7 V - 4000 mAh Li-ion
charging time : 10/12 h

operating time
High position : 3 h
Low position : 6 h

↕ 60 x 10 x 7 cm / 1.2 kg
⊗ 61 x 15 x 12 cm / 2 kg

058002
058316



INSPECTION LAMPS

INSPECTION HEADTORCH 280 L 100-280 lumens

3 W COB LED, 80 CRI+, 6500 K
3.7 V - 1500 mAh Li-po
micro USB charging
mains charger not incl.
operating time
High position : 2 h
Low position : 6 h
IP 65
↕ 8 x 5 x 4 cm / 0.1 kg
⊗ 5 x 11 x 18 cm / 0.2 kg

060845



PRO INSPECTION LAMP 800 L 120-800 lumens

COB LED
3.7 V - 2600 mAh Li-ion
USB charging (4 h)

operating time
2.5 > 9 h

IP 54

075900



LED WORKLIGHTS WITH TRIPOD

TRIPOD LAMP 4000 L 4000 lumens

3x 20 COB LED,
total 60 LED
3 m
power cord

059986

↕ 21 x 15 x 114 cm / 5.7 kg
⊗ 22 x 116 x 117 cm / 6.4 kg



AIR JACKS

DOUBLE BAG AIR JACK 082878

Pressure : 8 bar (116 PSI)
Weight 12 kg

60 x 52 x 14.5 cm
14.8 kg

SAFE
EN 1494

12 kg
LIGHT & COMPACT



max :
40 cm
(+ pad)
max :
34 cm
min :
12 cm



STABILITY ✓

TRIPLE BAG AIR JACK 082885

Pressure : 8 bar (116 PSI)
Weight 14 kg

62 x 56.5 x 18 cm
17.8 kg

SAFE
EN 1494

14 kg
LIGHT & COMPACT




max :
49.5 cm
(+ pad)
max :
43.5 cm
min :
14.5 cm



STABILITY ✓

WORKSTATION PREMIUM 5 DRAWERS

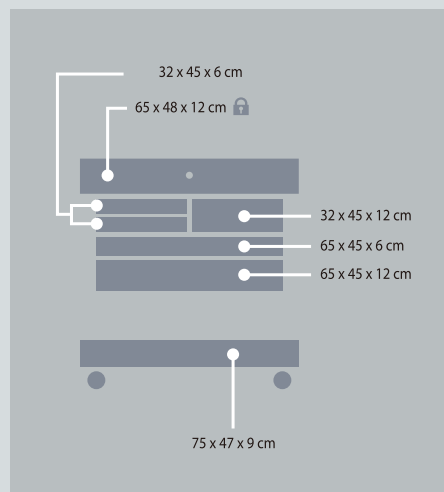

PLASTIC TROLLEY 3 SHELVES

087309

NEW



WORKSTATION 3 SHELVES 1 DRAWER

088023

NEW





GYSFLASH

CHARGERS

SMART HF INVERTER Pb

GYSFLASH TECHNOLOGY



Save and load settings. Automatic restart in case of power cut.



Start/stop Engine :
Compatible with Start/Stop vehicles.



Can bus ready: compatible with Can Bus Technology, the Gysflash can be connected to the motorcycle 12V socket (cable is optional).



Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.



"Cold charge" mode: performance-enhancing charging mode for cold or freezing weather conditions.



Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.



Power supply mode: Optimum floating charge, ideal for use during battery change to protect vehicle memory.
Also for when the vehicle is not in use for extended periods or for demonstration use.

SMART CHARGE

7 STEP / 8 STEP

1. Status analysis
2. Recovery
3. Test desulfation
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Refresh (for "8 step" only)
8. Floating 100%



8 STEP

Rebalancing of the battery cells for greater longevity (not available on all models).



**BEST
SELLER**

GYSFLASH 1.12

1 A



F FLASH Connector



029361
029514

GYSFLASH 4.12 & S 4.12

0.8/4 A



4.12
029422
029521

S 4.12 (110 V)
069190
072701
072817

110 V



GYSFLASH S 4.12
GYSFLASH 1.12 PL S



DISPLAY
BOX

GYSFLASH
4.12
x 5

026001





IP 65

WATER PROTECTION

GYSFLASH
1.12, 4.12, 6.12, 8.12, 12.12,
6 HERITAGE, 6.24, 9.24, 1.12 PL,
8.12 PL, 6.24 PL, 3.48 PL,
1.12 Lithium, 6.12 Lithium



12V

GYSFLASH 6.12

0.8/6 A



GYSFLASH 8.12

8 A



GYSFLASH 12.12

12 A



DESIGN
GYS
FRANCE
MADE IN
GYS CHINA

	PATENTS REGISTERED NUMBERS 002286008 & 002279927 EUROPEAN TRADEMARK & DESIGN	50 / 60 Hz		Power	I _{charge}	V	Charge	Maintenance		Ondulation / Ripple	Charging curve		IP		
GYSFLASH 1.12		220-240 V AC	1 m	18 W	1 A	12 V	2 > 32 Ah	2 > 100 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	7 steps	IP 65	0.44 kg	130 × 80 × 38 mm
GYSFLASH 4.12		220-240 V AC	2 m	70 W	0,8/4 A	12 V	1.2 > 90 Ah	1.2 > 130 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	7 steps	IP 65	0.69 kg	170 × 90 × 51 mm
GYSFLASH S 4.12		100-127 V AC													
GYSFLASH 6.12		220-240 V AC	2 m	90 W	0,8/6 A	12 V	1.2 > 125 Ah	1.2 > 170 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	8 steps	IP 65	0.77 kg	190 × 100 × 52 mm
GYSFLASH 8.12		220-240 V AC	2 m	130 W	8 A	12 V	15 > 160 Ah	15 > 240 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	8 steps	IP 65	0.85 kg	190 × 100 × 52 mm
GYSFLASH 12.12		220-240 V AC	2 m	195 W	12 A	12 V	20 > 250 Ah	20 > 330 Ah	<0.4 Ah/month	<100 mV Rms	IUoU	8 steps	IP 65	1.1 kg	221 × 111 × 58 mm



GYSFLASH

CHARGERS

**SMART HF
INVERTER Pb**



HERITAGE • 6/12V

GYSFLASH 6 HERITAGE

0.8/6 A

GO > 2V SSM

REFRESH 8 STEP



029538



6/12/24V

GYSFLASH 6.24

0.8/6 A

GO > 2V SSM START STOP

7 STEP



029460



GYSFLASH 9.24

9 A

GO > 2V SSM START STOP

REFRESH 8 STEP



029477

029651

 PATENTS REGISTERED NUMBERS 002280008 & 002279927 EUROPEAN TRADEMARK & DESIGN	 50 / 60 Hz		Power	 I _{charge}	 V	 Charge	 Maintenance	 Z _z	Ondulation;Ripple	Charging curve		IP		
GYSFLASH 6 HERITAGE	220-240 V AC	2 m	90 W	0,8/6 A	6/12 V	1.2 , 125 Ah	1.2 , 170 Ah	<0.4 Ah /month	<150 mV Rms	IUoU	8 steps	IP 65	0.77 kg	190 × 100 × 52 mm
GYSFLASH 6.24	220-240 V AC	2 m	130 W	0,8/6 A	6/12 V	1.2 , 125 Ah	1.2 , 170 Ah	<0.4 Ah /month	<150 mV Rms	IUoU	7 step	IP 65	0.85 kg	190 × 100 × 52 mm
				0,8/4 A	24 V	1.2 , 100 Ah	1.2 , 140 Ah							
GYSFLASH 9.24	220-240 V AC	2 m	190 W	9 A	6/12 V	18 , 220 Ah	18 , 300 Ah	<0.4 Ah /month	<100 mV Rms	IUoU	8 step	IP 65	1.1 kg	221 × 111 × 58 mm
				6 A	24 V	15 , 125 Ah	15 , 170 Ah							

DESIGN
GYS
FRANCE

MADE IN
GYS CHINA

GYSFLASH TECHNOLOGY



Save and load settings. Automatic restart in case of power cut.



Start/stop Engine:
Compatible with Start/Stop vehicles.



Can bus ready : compatible with Can Bus Technology, the Gysflash can be connected to the motorcycle 12V socket (cable is optional).



Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.



Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.



GYSFLASH LITHIUM



55

GYSFLASH LITHIUM

SMART HF INVERTER CHARGERS

CHARGERS


SMART HF INVERTER LiFePO4



SMART CHARGE 7 STEP / 8 STEP / 8 STEP LiFePO4

Pb

1. Status analysis
2. Recovery
3. Test desulfation
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Refresh (for "8 step" only)
8. Floating 100%




REFRESH 8 STEP

Rebalancing of the battery cells for greater longevity (not available on all models).

LiFePO4 (LFP)

1. UVP Wake up - Status analysis
2. Recovery
3. Fast charge 90%
4. Absorption 95%
5. Test
6. Completion
7. Equalization
8. Floating 100%

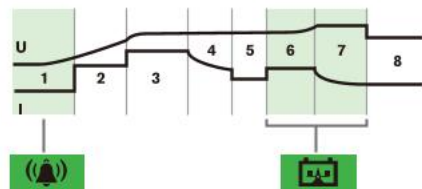

Battery reactivation when in UVP protection. Balancing of the battery cells.

12V

GYSFLASH 1.12 Lithium

1 A



F FLASH Connector



029675

GYSFLASH 6.12 Lithium

4/6 A



F FLASH Connector



029729

DESIGN
GYS FRANCE
MADE IN
GYS CHINA

DESIGN GYS FRANCE MADE IN GYS CHINA	 50 / 60 Hz		Power						Ondulation / Ripple	Charging curve		IP 		
GYSFLASH 1.12 Lithium	220-240 V AC	1 m	18 W	1 A	12 V	0.5 ≥ 20 Ah	0.5 ≥ 50 Ah	<0.4 Ah/ month	<150 mV Rms	IUoU	8 step	IP 65	0.44 kg	130 × 80 × 38 mm
GYSFLASH 6.12 Lithium	220-240 V AC	2 m	90 W	4/6 A	12 V	1.2 ≥ 125 Ah	1.2 ≥ 170 Ah	<0.4 Ah/ month	<150 mV Rms	IUoU	8 step	IP 65	0.77 kg	190 × 100 × 52 mm



GYSFLASH Pb / LITHIUM

CHARGERS

SMART HF INVERTER Pb/LiFePO4

GYSFLASH TECHNOLOGY



Save and load settings. Automatic restart in case of power cut.



Start/stop Engine : Compatible with Start/Stop vehicles.



Can Bus Ready : compatible with Can Bus Technology, the Gysflash can be connected to the motorcycle 12 V socket (cable is optional).




Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.

SMART CHARGE 7 STEP / 8 STEP LiFePO4


Pb

1. Status analysis
2. Recovery
3. Test desulfation
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Floating 100%



LiFePO₄ (LFP)

1. UVP Wake up
2. Status analysis
3. Recovery
4. Fast charge 90%
5. Test
6. Completion
7. Equalization
8. Floating 100%



UVP Wake up (Under Voltage Protection)
Battery reactivation when in UVP protection.

Equalizing Balancing System
Balancing of the battery cells.


OPTIONS For GYSFLASH 8.12 PL



SAE / Cigar lighter
(45 cm)
077331



Extension cable
SAE / SAE (45 cm)
077348

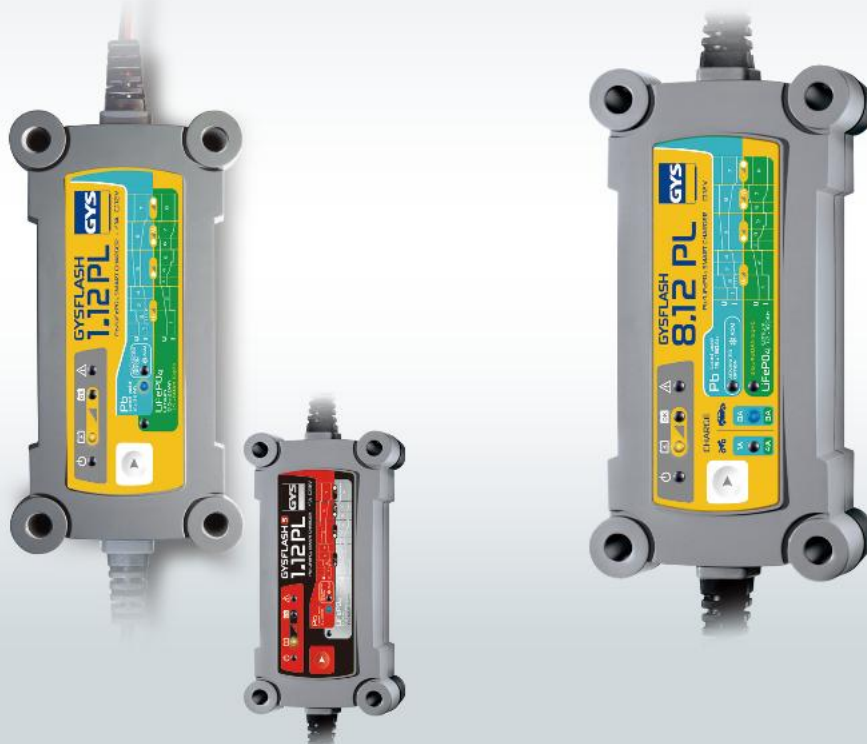

12 V

GYSFLASH 1.12 PL & 1.12 S PL

1 A



1.12 PL
026902
027541

1.12 S PL (110 V)
070851
072794

GYSFLASH 8.12 PL

1/4 / 8 A



069282

 PATENTS REGISTERED NUMBERS 002280008 & 002279927 EUROPEAN TRADEMARK & DESIGN		 50 / 60 Hz	 Power	 I _{charge}	 V	 Charge	 Maintenance	 Z _z	 Ondulation; Ripple	 Charging curve	 IP				
DESIGN GYS FRANCE	GYSFLASH 1.12 PL	220-240 V AC	2 m	20 W	1 A	12 V	2 × 32 Ah (Pb) 0.5 × 20 Ah (LiFeP04)	2 × 100 Ah (Pb) 0.5 × 50 Ah (LiFeP04)	<0.4 Ah/ month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFeP04)	IP 65	0,69 kg	170 × 90 × 51 mm
	GYSFLASH 1.12 PL S	100-127 V AC													
MADE IN GYS CHINA	GYSFLASH 8.12 PL	220-240 V AC	2 m	130 W	1/4/8 A	12 V	15 × 160Ah (Pb) 1.2 × 160 Ah (LiFeP04)	15 × 240Ah (Pb) 1.2 × 240 Ah (LiFeP04)	<0.4 Ah/ month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFeP04)	IP 65	0,85 kg	190 × 100 × 52 mm

GYSFLASH TECHNOLOGY



Save and load settings. Automatic restart in case of power cut.



Start/stop Engine :
Compatible with Start/Stop vehicles.



Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.




Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.

SMART CHARGE 7 STEP / 8 STEP LiFePO₄


Pb

1. Status analysis
2. Recovery
3. Test desulfation
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Floating 100%



LiFePO₄ (LFP) / Li-ion

1. UVP Wake up
2. Status analysis
3. Recovery
4. Absorption 95%
5. Test
6. Completion
7. Equalization
8. Floating 100%



UVP Wake up (Under Voltage Protection)
Battery reactivation when in UVP protection.

Equalizing Balancing System
Balancing of the battery cells.

For GYSFLASH 3.48 PL

OPTIONS



SAE XLR
027428



SAE Anderson
027473



SAE Jack
025646



24 V

ELECTRICAL MOBILITY

GYSFLASH 6.24 PL



SAE Connector



027398

48 V

INDUSTRY / ELECTRICAL MOBILITY

GYSFLASH 3.48 PL



SAE Connector



027893

DESIGN GYS FRANCE	MADE IN GYS CHINA			Power	I _{charge}	 V	 n cell			 Charge	 Maintenance	 Z _z	Ondulation/Ripple	Charging curve		IP		
		Pb					LFP	NMC										
GYSFLASH 6.24 PL		220-240 V AC	2 m	190 W	6 A	24 V	12	8	6	15 > 125 Ah (Pb) 2 > 125 Ah (Li)	15 > 170 Ah (Pb) 2 > 170 Ah (Li)	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 65	1,1 kg	221×111×58 mm
GYSFLASH 3.48 PL		220-240 V AC	2 m	195 W	3 A	48 V	24	15/16	13/14	6 > 60 Ah 3 > 60 Ah	6 > 85 Ah 3 > 85 Ah	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 65	1,1 kg	221×111×58 mm



GYSFLASH

CONNECTORS



F Flash Connector

GYSFLASH ≤ 6A : 1.12 / 4.12 / 6.12 / 6 Heritage / 6.24 / 1.12 Li / 6.12 Li / 1.12 PL



F2 / Charge indicator
L 0.56 m (1.3 mm²)
All 12V LEAD
029149



F4 / Charge indicator eyelets
ø M6 L 0.56 m (1.3 mm²)
All 12V LEAD
029200



F6 / Charge
L 2.50 m (1.3 mm²)
All 12V LEAD
029057

SELECT THE RIGHT GYSFLASH

GYSFLASH						MEDICAL SERVICE - LEISURE					MOTORBIKE LIGHT MOBILITY					AUTO - CAMPER VAN - TRUCK										MARINE				INDUS TRY	URBAN
	6V	12V	24V	36V	48V																										

Pb

1.12																	M														
1.12 PL																	M														
4.12																	M	M								M					
6.12																			M							M					
8.12		12V																		M											
8.12 PL																				M											
12.12																															
6 Heritage	6V	12V																	M							M					
6.24 PL			24V																												
6.24	6V	12V	24V						M										M		M					M					
9.24																						M						M			
3/48 PL					48V																										

LiFePO₄

1.12 Lithium																	M														
1.12 PL																	M														
6.12 Lithium																															
8.12 PL		12V																													
6.24 PL			24V																												
3/48 PL					48V																										

Li-ion

6.24 PL			24V																												
3/48 PL					48V																										

M = maintenance only



BATTERY SUPPORT UNIT

Battery support for:

- ✓ Diagnostics
- ✓ ECU programming
- ✓ ADAS recalibration

PFC POWER FACTOR CORRECTION

FV FLEXIBLE VOLTAGE



22 languages

GB DK CZ
FR FI PL
DE TR SK
NL HR UA
ES GR
PT HU
IT CN simplified
RU CN traditional
SE JP

✓ SHOWROOM



NEW DESIGN
02 / 2026



OLD DESIGN



NEW DESIGN
02 / 2026

12 V

GYSFLASH 100 BSU 12V

2,5 m - 16 mm²

100 A

PFC SC



901841

901742

5 m - 16 mm²

901834

901896

GYSFLASH 102 BSU 12V

5 m - 16 mm²

100 A

PFC SC



902138

**OPTION
BSU Flash XL
028890**



**OPTION
Cable
support
052284**

OPTION



Anderson/Clamps
2,5 m - 16 mm² 056503C
5 m - 16 mm² 054615C
8 m - 16 mm² 056572C

**Wall support for GYSFLASH
102.12**

**INCLUDED
Fixing kit**



**OPTION
Magnetfix 50
029637**



**OPTION
GYSFLASH PRO vertical wall
mounting kit
082694**



**OPTION
Wall support
055513**



DESIGNED IN FRANCE



50 / 60 Hz



12V



mm²



1600W



2V



100 A



75 A



66 A



20 × 1200 Ah



—



Ø M6



21



7.4 kg



32 × 10.5 × 29.2 cm



31 × 25 × 41 / 7.4

GYSFLASH 100 BSU 12V

185 × 265 V

2,5 m
5 m

16

12V

1600W

2V

100 A

75 A

66 A

20 × 1200 Ah

—

Ø M6

21

7.4 kg

32 × 10.5 × 29.2 cm

31 × 25 × 41 / 7.4

GYSFLASH 102 BSU 12V

185 × 265 V

5 m

16

12V

1600W

2V

100 A

75 A

66 A

20 × 1200 Ah

—

Ø M6

21

9.1 kg

12 × 34.5 × 29.5 cm

24 × 40 × 30 / 9.1

GYSFLASH BSU

BATTERY SUPPORT UNIT



PLAYLIST
GYSFLASH
PRO

NEW



ARTIC

CHARGERS

IP 65

WATER
PROTECTION
ARTIC 1500, 4000 & 8000

CHARGERS ONLY



SSM

Save and load settings.
Automatic restart in case of
power cut.

START
STOP

Start/stop Engine :
Compatible with Start/Stop
vehicles.



"Cold charge" mode:
performance-enhancing
charging mode for cold or
freezing weather conditions.



AUTOMATIC SMART HF INVERTER

REGULATED
IUoU
FAST CHARGE

ARTIC 800

12V 0.8A 60 > 7 V

SSM

029569



ARTIC 1500

12V 1.5A 60 > 7 V

SSM

029576



ARTIC 4000

6/12V 4/1-4A 60 > 2 V (6V)
60 > 7 V (12V)

SSM

START
STOP



029583



ARTIC 8000

2/8A 12V 60 > 7 V

SSM

START
STOP



029590



INCLUDED

all ARTIC

Eyelets /
Câblés /
Ösen
30 cm
026872

Clamps /
Pincés /
Klemmen
35 cm
026865



				CHARGE 						SSM				CHARGER + TESTER	  Bzz		
		50 / 60 Hz			Moyen / Average (EN 60335)	Efficace / RMS		Polarity protection	Cold Charge	Self Start memory	Full security	Start/Stop engine	Fuse		CONTROL	L x W x H cm / kg	
MADE IN CHINA	ARTIC 800	100-240 V	15 W	12 V	0,8 A	—	—	•	—	•	—	—	—	—	—	6 × 15.1 × 25.5 / 0.43	0.43 kg
	ARTIC 1500	220-240 V	27 W	12 V	1,5 A	—	—	•	—	•	—	—	—	—	—	25.7 × 15.1 × 6 / 0.5	0.5 kg
	ARTIC 4000	220-240 V	75 W	6 V 12 V	4 A 1 A / 4 A	—	2	•	•	•	•	•	—	OK	—	24.9 × 15.1 × 6 / 0.8	0.78 kg
	ARTIC 8000	220-240 V	130 W	12 V	2 / 8 A	—	2	•	•	•	•	•	—	OK	—	34.1 × 17.7 × 7.3 / 1.1	1.13 kg
	ENERGY 126	220-240 V	90 W	12 V	4 A	6 A	—	—	—	•	—	—	10 A	—	—	16.6 × 11.8 × 22.5 / 2	2 kg
MADE IN GYS CHINA	TCB 120 automatic	220-240 V	150 W	12 V	3,5 - 7 A	10.5 A	2	•	—	•	—	•	15 A	OK	OK	17.9 × 12.3 × 30.4 / 3.2	3.2 kg

NEW
DESIGN

2 IN 1

CHARGE

12V • TRADITIONAL **W**

12 V • AUTOMATIC WU

ENERGY 126

4 A



TCB 120

3.5/ 7 A

GO > 3.5 V



			5 Ah		10 Ah	15 Ah	20 Ah	6V		40 Ah	80 Ah	90 Ah	110 Ah	120 Ah			180 Ah	240 Ah	300 Ah	+ Ah					
RECOMMENDATION			6V	12V	24V																				
Maintenance																									
ARTIC 800		•		1,6 > 25 Ah		1,6 Ah >				> 80 Ah															
ARTIC 1500		•		3 Ah >				> 40 Ah		3 Ah > 100 Ah															
ARTIC 4000	•	•		2 Ah >					> 70 Ah		2 Ah > 130 Ah														
ARTIC 8000		•		4 Ah >					> 160 Ah							4 Ah > 240 Ah									
ENERGY 126		•								15 > 60 Ah															
TCB 120		•								20 > 120 Ah															



CT

CHARGERS



CT 160

9A

1.5 m - 1.5 mm² → 40 A

024106

☎ : 025325



CT 210

12A

1.5 m - 2.5 mm² → 40 A

024113

☎ : 025349

12/24 V • MANUAL W

MULTICHARGE



6 charging speeds

MULTICHARGE CT 48

32A



026087

2 m - 6 mm² → 60 A

12/24/36/48 V • MANUAL W

Fuse
x1010A
WATTMATIC 100
05453015A
CT 160,
WATTMATIC 140
05449320A
CT 210,
WATTMATIC 150 & 170
05450925A
CA 150,
WATTMATIC 180
05451640A
CT 48
05464650A
CA 360
054622

DESIGN GYS FRANCE	MADE IN GYS CHINA			CHARGE 								
					Moyen / Average (EN 60335)			Efficace / RMS				
					Reg 1	Reg 2	Reg 3					
CT 160	230V, 50/60 Hz	190W	12/24V	12V,	7 A	9 A (boost)	—	13,5 A	2	15 A	20,5 × 30 × 13,5 cm	3,9 kg
				24V,	3 A	5 A (boost)	—	7,5 A	2			
CT 210	230V, 50/60 Hz	260W	12/24V	12V,	8 A	12 A (boost)	—	18 A	2	20 A	22,5 × 33,5 × 14,5 cm	5,2 kg
				24V,	4 A	6 A (boost)	—	9 A	2			
MULTICHARGE CT 48	230V, 50/60 Hz	1200W	12/24/36/48V	12V,	20,8 A, 32,4 A			31 A	6	40 A	32,5 × 39,5 × 20,5 cm	15,5 kg
				24V,	20,1 A, 31,8 A			29 A	6			
				36V,	19,6 A, 22,4 A (30,4 A boost)			29 A	6			
				48V,	15,5 A, 18,7 A (24,3 A boost)			28 A	6			
CA 150	230V, 50/60 Hz	500W	12/24V	8 A	10 A (boost)	—	18 A	2	25 A	33 × 26 × 14 cm	6 kg	
CA 360	230V, 50/60 Hz	920W	12/24V	7 A	15 A (boost1)	25 A (boost2)	37 A	3	50 A	44 × 31 × 23 cm	14 kg	
WATTMATIC 100	230V, 50 Hz	170W	6/12V	3 A	5 A		11,4 A	2	10 A	24 × 26 × 13 cm	3,8 kg	
WATTMATIC 170	230V, 50 Hz	280W	6/12V	6,5 A	10 A (boost)	—	18,8 A	2	20 A	36 × 22 × 14 cm	5 kg	



Protection for on-board electronics



CA 150

10 A



1.5 m - 2.5 mm²  40 A
024434

CA 360

25 A



2 m - 6 mm² 60 A
023185

12 / 24 V • AUTOMATIC W2

W2

WATTMATIC



Protection for on-board electronics



WATTMATIC 100


5 A

GO > 3.5 V



024823

025417



WATTMATIC 170

10 A

GO > 3.5 V



025615

025639



6/12V • AUTOMATIC **WUoU**

WUoU

		5 Ah			10 Ah	15 Ah	20 Ah	6V		40 Ah	80 Ah	90 Ah	110 Ah	120 Ah		180 Ah	240 Ah	300 Ah	+ Ah		
RECOMMENDATION		6V	12V	24V																	
CT 160		■	■						12 V : 25 > 160 Ah - 24 V : 15 > 90 Ah												
CT 210		■	■						12 V : 35 > 210 Ah - 24 V : 20 > 100 Ah												
MULTICHARGE CT 48		■	■	+48 V									12, 24, 36 V : 90 > 450 Ah - 48 V : 70 > 360 Ah								
CA 150		■	■						35 > 150 Ah												
CA 360		■	■						40 > 350 Ah												
WATTMATIC 100		■	■						15 > 100 Ah												
WATTMATIC 170		■	■						25 > 180 Ah												



CHARGERS & STARTERS

SSM SELF START MEMORY



12V • AUTOMATIC **W2**

STARTUP 80

17 A

SSM

024922

025127



12V

12/24V • TRADITIONAL **W**

START 200

18 A

SSM

1.5 m - 6 mm² → 60 A

025530



START 300

23 A

SSM

2 m - 10 mm² → 220 A

025547



NEOSTART 320

9 / 40 A

SSM

2 m - 10 mm² → 220 A

025301



DESIGN GYS FRANCE MADE IN GYS CHINA				CHARGE 								START 						
	50 / 60 Hz			CHARGE kW	START kW		Efficace / RMS	Moyen / Average (EN 60335)	Boost	Automatic	Manual	 min : max	1V/°C	0V/°C				
START UP 80	230V	13 A	12V	0,35	1	2	13,5-25 A	9 A	17 A	•	—	40 › 170 Ah	50 A	80 A	—	—	12 × 18× 32 cm	4,4 kg
START 200	230V	13 A	12V	0,39	1,4	3	15-25 A	11 A	18 A	—	•	53 › 240 Ah	80 A	120 A	—	50 A	37 × 26× 18 cm	8 kg
START 300	230V	13 A	12V	0,8	3,6	3	13-36 A	10 A	23 A	—	•	42 › 300 Ah 38 › 224 Ah	100 A	165 A	—	80 A	43 × 33× 23 cm	13,8 kg
		13 A	24V	1,2	3,6			8 A	17 A									
NEOSTART 320	230V	13 A	12 / 24V	0,8	6,5	3	40 A	10 A 9 A	40 A 30 A	—	•	20 › 700 Ah	160 A	270 A	—	150 A	41 × 30× 21 cm	14,7 kg
NEOSTART 420	230V	16 A	12 / 24V	1,7	9	3	70 A	20 A	40 A	—	•	20 › 1000 Ah	250 A	420 A	—	200 A	47 × 32× 27 cm	20,9 kg
NEOSTART 620	230V	16 A	12 / 24V	2	10	3	90 A	30 A	60 A	—	•	20 › 1350 Ah	330 A	620 A	—	200 A	47 × 32× 27 cm	24 kg



12/24 V • TRADITIONAL W

40 A

1.8 m - 10 mm² 500 A

025295

: 025479



60 A

1.8 m - 16 mm²  500 A

025288

025486



Fuse
x2



50 A
Start 200
054622

80 A
Start 300
054653



150 A
Neostart 320
054639

200 A
Neostart 420, 620
054547

	RECOMMENDATION			5 Ah	10 Ah	15 Ah	20 Ah	6V	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ A
	6V	12V	24V														
START UP 80	-								35 > 50 Ah								
START 200	-								35 > 40 Ah	40 > 80 Ah							
START 300	-	-							35 > 50 Ah	50 > 100 Ah							
NEOSTART 320	-	-							35 > 60 Ah	60 > 120 Ah							
NEOSTART 420	-	-								35 > 80 Ah	80 > 160 Ah						
NEOSTART 620	-	-								45 > 100 Ah					100 > 200 Ah		



GYSPACK

BOOSTERS

Pb/Lead

INSIDE

POWER SUPPLY
12V DC

COMPRESSOR

Air Kit
included
17 bars

NEW

NEW
DESIGN

12 V

18 Ah

INSIDE

HOBBIES
OCCASIONAL

12 V

17 Ah

INSIDE

12 V

22 Ah

INSIDE

GYSPACK 400

1 250 A

480 A
1V/Cell

GYSPACK AIR 401

1 100 A

380 A
1V/Cell

GYSPACK 600

1 750 A

550 A
1V/Cell0.6 m - 16 mm² → 300 A

025455

025516

1.2 m - 12.5 mm² →

088801

0.6 m - 16 mm² → 300 A

027336

027497

INCLUDED GYSPACK 400 / AIR 401 / 600 / PRO



After each use

OPTION

MEMORY AUTO SAVE
CABLE OBD 1,5 m
054202

Fuse 7,5 A



CHARGER

Power in 110-240 V/out 12 V

50/60 Hz

054677

054660



WU

FV FLEXIBLE

VOLTAGE


85 V

265 V


Each set includes 1 set of cables

DESIGN
GYS FRANCEMADE IN
GYS CHINA

	Inside	START	1 V/Cell	0 V/Cell	Peak Battery	START PETROL & DIESEL	ON/OFF	Fuse	START PETROL & DIESEL	EXTERNAL Charge 230V	TEST OK	LxWxH cm / kg	LxWxH cm / kg
GYSPACK 400	12 V-18 Ah	12 V	480 A	900 A	1250 A	Lead/LFP	—	—	—	12 V DC/0.5A (x2) Cigarette Lighter: 12V - 8A	12 V DC/1.2A	26.4 x 13. x 29.5 / 6.4	28.5 x 16 x 34 7.2
GYSPACK AIR 401	12 V-17 Ah	12 V	380 A	700 A	1100 A	Lead/LFP	•	•	17 bars	12 V DC/1.2A	12 V DC/1.2A	33 x 18.2 x 27.4 / 8.3	38.5 x 22 x 44 9.4
GYSPACK 600	12 V-22 Ah	12 V	550 A	1050 A	1750 A	Lead/LFP	—	—	—	12 V DC	12 V DC/1.2A	25.5 x 14 x 29.5 / 7.5	29.5 x 16 x 35.5 / 8.2
GYSPACK PRO	12 V-22 Ah	12 V	600 A	1100 A	1750 A	Lead/LFP	•	•	—	12 V DC	12 V DC 1.2A	35 x 14 x 37 / 9	39 x 17 x 45 9.5
GYSPACK HERITAGE 6/12	6V - 2 x 20 Ah	6V	400 A	800 A	3200 A	Lead/LFP	•	•	1 x 300 A	12 V DC	12 V DC 2A	36 x 11 x 45 / 13	39 x 22 x 51 / 14



*C = cells, cellules



HERITAGE 6/12 V



67

GYPACK

BOOSTERS • Pb INSIDE



HOBBIES OCCASIONAL PRO INTENSIVE

GYPACK PRO

1 750 A

600 A
1V/Cell



1.1 m - 25 mm² 500 A

026155

054684

6/12 V 20 Ah + 20 Ah INSIDE

HOBBIES OCCASIONAL PRO INTENSIVE

GYPACK HERITAGE 6/12

6 V

3 200 A

400 A
1V/Cell

12 V

1 600 A

450 A
1V/Cell

1.8 m - 25 mm² 600 A

025844



INCLUDED GYPACK Heritage

CHARGER

⊖ Power in 110-240 V / out 12 V

50/60 Hz

054684

054691



REGULATED
100%
FAST CHARGE

FV

FLEXIBLE
VOLTAGE

85 V

265 V

100%



RECOMMENDATION

	6V	12V	24V	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah

GYPACK AUTO / 400

GYPACK AIR 401

GYPACK 600

GYPACK PRO

GYPACK HERITAGE

> 50 Ah

> 50 Ah

> 90 Ah

> 90 Ah

> 140 Ah

> 50 Ah



GYSPACK / STARTPACK

BOOSTERS

Pb/Lead



POWER SUPPLY
12V DC

FOR GYSPACK 660/750/800/700/900

OPTION

MEMORY AUTO SAVE
CABLE OBD 1,5 m
054202



Fuse 7,5 A

Fuse
x2

200 A
054547C

300 A
054561C



SPIRAL TECHNOLOGY

New handle design



12 V

28 Ah

INSIDE

HOBBIES OCCASIONAL PRO INTENSIVE

GYSPACK 660

1 900 A

640 A
1V/C

1.3 m - 25 mm² 600 A

027862
027879



INCLUDED GYSPACK 660

28 Ah

SPIRAL

INSIDE

HOBBIES OCCASIONAL PRO INTENSIVE

GYSPACK 750

2 500 A

750 A
1V/C

1.3 m - 25 mm² 600 A

026179
026353



INCLUDED GYSPACK 750 / GYSPACK PRO 800

28 Ah

SPIRAL

INSIDE

HOBBIES OCCASIONAL PRO INTENSIVE

GYSPACK PRO 800

2 500 A

700 A
1V/C

1.8 m - 25 mm² 600 A

068759
072107

CHARGER

Power in 100-240 V / out 12 V
50/60 Hz
027992

025929



85 V 265 V

FV FLEXIBLE VOLTAGE

CHARGER

Power in 110-240 V / out 12 V
50/60 Hz
054684

054691



85 V 265 V

FV FLEXIBLE VOLTAGE



After each use

DESIGN GYS FRANCE

MADE IN
GYS CHINA

Inside	START				START PETROL & DIESEL	TEST	OK	CHARGER INSIDE	EXTERNAL Charge 230V	Protection		Power out		Fuse	Fuse	LxWxH cm	LxWxH cm	kg
		1V/Cell	0 V/Cell	Peak Battery						ON			Memory					
28 Ah	12V	640 A	1200 A	1900 A	Lead,LFP	●	—	110 - 240 V	12V,2 A DC	●	●	➡ 12 V DC	—	1 × 200 A	35 x 19 x 40	39 x 23 x 45 / 13.5		
28 Ah	12V	750 A	1450 A	2500 A	Lead,LFP	●	—	110 - 240 V	12V,2 A DC	●	●	➡ 12 V DC	—	2 × 200 A	35 x 19 x 40	39 x 23 x 45 / 13.5		
28 Ah	12V	700 A	1320 A	2500 A	Lead,LFP	●	—	110 - 240 V	12V,2 A DC	●	●	➡ 12 V DC	10 A	2 × 200 A	31 x 19 x 35	32 x 23 x 37 / 18.4		

	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah
RECOMMENDATION	6V	12V	24V	6V	6V	6V	6V	6V	6V	6V	6V	6V	6V
GYSPACK 660													
GYSPACK 750													
GYSPACK PRO 800													



12/24 V

22Ah + 22Ah

INSIDE

HOBBIES PRO
OCCASIONAL INTENSIVE

STARTPACK TRUCK

12V	3 200 A	750 A 1V/C
24V	1 600 A	650 A 1V/C



1.8 m - 25 mm²  600 A

STARTPACK TRUCK MOBILE

12V	3 200 A	750 A 1V/C
24V	1 600 A	650 A 1V/C

1.8 m - 25 mm²  600 A **026025**
 : 028807

INCLUDED STARTPACK TRUCK & TRUCK MOBILE

CHARGER

⊕ Power in 110-240 V / out 12 V
50/60 Hz
054684
☎: 054691



**I REGULATED
iUoU
FAST CHARGE**

FV FLEXIBLE VOLTAGE

85 V ————— 265 V

100' 250'

bed bed bed bed bed bed bed bed

OPTION

MEMORY AUTO SAVE
CABLE OBD 1,5 m
054202

Fuse 7,5 A



After each use

DESIGN GYS FRANCE

OFF DESIGN GYS FRANCE		 Inside	START 				 START PETROL & DIESEL		 50 / 60 Hz	CHARGER INSIDE 	EXTERNAL Charge 230V 	Protection			Power out		 Fuse	 LxWxH cm	 LxWxH cm : kg
			 1V/Cell	0 V/Cell	Peak Battery										Memory				
MADE IN GYS CHINA	STARTPACK TRUCK	2 × 22 Ah	12V	750 A	1450 A	3200 A	Lead/LFP	●	110 - 240 V	—	12V;2 A DC	●	●		12 V DC	1 × 300 A	37 x 20 x 46	39 x 22 x 50 ; 18	
	/ TRUCK MOBILE		24V	650 A	1300 A	1600 A	Lead/LFP										12 V DC	37 x 20 x 57	39 x 24 x 60 ; 21

		5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ A
	RECOMMENDATION	6V	12V	24V		6V								
STARTPACK TRUCK										> 150 Ah				
STARTPACK TRUCK MOBILE										> 150 Ah				



NOMAD POWER

BOOSTERS

LITHIUM INSIDE



SPECIALIST HOBBY • Non professional use



START ENGINE



POWER BANK



LIGHT

INCLUDED

SMART CABLE MULTI SECURITIES

- ✓ Nomad Power 401
- ✓ Nomad Power 501



- ✓ Nomad Power PRO 701
- ✓ Nomad Power PRO 801
- ✓ Nomad Power PRO 901 FC



NEW

NEW



12V

NOMAD POWER 401

900 A

350 A
1V/Cell



0,28 m - 5,2 mm²
AWG10
SMART CABLE
MULTI SECURITIES

087316

NOMAD POWER 501

1200 A

500 A
1V/Cell



0,28 m - 5,2 mm²
AWG10
SMART CABLE
MULTI SECURITIES

087323

	LITHIUM			START					INPUT	OUTPUT		
	CAPACITY/CELL	TYPE	FULL CHARGE	1 V/Cell	0 V/Cell	Peak Battery					cm	kg
NP 401	2.5 Ah - 37 Wh	LiCoO2	3 h	350 A	700 A	900 A	12 V (Pb only)		USB-C : 5V/2A	(x1) USB 3.0 QC : 5.9/12V - 2A (x1) USB-A : 5V - 2.1A	14.5 × 8.5 × 3	0.32
NP 501	3 Ah - 45 Wh	LiCoO2	3 h 30	500 A	1000 A	1200 A	12 V (Pb only)		USB-C : 5V/2A	(x1) USB 3.0 QC : 5.9/12V - 2A (x1) USB-A : 5V - 2.1A (x1) JACK DC ø5.5 : 15V - 5A	17.5 × 8.5 × 3	0.48
NP PRO 701	4 Ah - 59.2 Wh	LiCoO2	3 h	700 A	1100 A	1250 A	12 V (Pb only)		USB-C : 5V/3A	(x1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A (x1) USB-A : 5V - 2.1A (x1) USB-C : 5V - 3A (x1) JACK DC ø5.5 : 15V - 10A	22.8 × 10 × 3.8	0.82
NP PRO 801	5 Ah - 74 Wh	LiCoO2	4 h	850 A	1300 A	1500 A	12 V (Pb only)		USB-C : 5V/3A	(x1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A (x1) USB-A : 5V - 2.1A (x1) USB-C : 5V - 3A (x1) JACK DC ø5.5 : 15V - 10A	22.8 × 10 × 3.8	0.82
NP PRO 901 FC	6 Ah - 92.5 Wh	LiCoO2	5h (with 15W charger) 1h15 (with 67W charger)	900 A	1400 A	1700 A	12 V (Pb only)		PD USB-C : 60W max	(x1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A (x1) USB-A : 5V - 2.1A (x1) USB-C Power Delivery : 60W (x1) JACK DC ø5.5 : 15V - 10A	22.8 × 10 × 3.8	0.82



NEW



Normal charge 100% in 3 h



NEW



Normal charge 100% in 4 h



NEW



FAST CHARGE

100% in 1 h 15

12 V

NOMAD POWER PRO 701

1250 A **700 A**
1V/Cell



085855

NOMAD POWER PRO 801

1500 A **850 A**
1V/Cell



085831

NOMAD POWER PRO 901 FC

1700 A **900 A**
1V/Cell



085879



Recommendation

NP 401	5 > 70 Ah											
NP 501	5 > 90 Ah											
NP PRO 701						5 > 140 Ah						
NP PRO 801						5 > 150 Ah						
NP PRO 901 FC						5 > 150 Ah						

OPTION



67 W Fast USB-C Charger
✓ Nomad Power PRO 901 FC
087132



15 W USB-C Charger
✓ Nomad Power 401 / 501
✓ Nomad Power PRO 701 / PRO 801 / PRO 901 FC
087101



15 W USB-C Charger
✓ Nomad Power 401 / 501
✓ Nomad Power PRO 701 / PRO 801 / PRO 901 FC
087354



NEW



NOMAD POWER

BOOSTERS LITHIUM



SPECIALIST HOBBY • Non professional use



LIGHT



START ENGINE



POWER BANK



3 Lights
modes
Normal
Flashing
S.O.S

NEW
12/2025



3 Lights
modes
Normal
Flashing
S.O.S

NEW
12/2025



12 V

NOMAD POWER PRO XL

2000 A

1000 A
1V/Cell



088818



NOMAD POWER PRO XXL

3200 A

1500 A
1V/Cell



088924



MADE IN CHINA	LITHIUM			START				INPUT	OUTPUT	POWER BANK	
	CAPACITY/CELL	TYPE	FULL CHARGE	1 V/Cell	0 V/Cell	Peak Battery				OBD supply compatibility (with 054202)	
NP PRO XL	8 Ah - 118.4 Wh	LiPo	2 h with 67 W Fast USB-C charger 6.5 h with 15 W USB-C charger	1000 A	1500 A	2000 A	12 V (Pb/Lead only)	—	(x1) USB-C (60 W max) (x1) USB-A : 5 V - 2.4 A	(x1) USB 3.0 Quick charge : 5.9/12 V (x1) DC : 12/16 V - 10 A	—
NP PRO XXL	10.4 Ah - 153.9 Wh	LiCoO2	3 h	1500 A	2500 A	3200 A	12 V (Pb/Lead only)	(x1) USB-C : 5.9 V - 2 A; 9 V - 2 A JACK DC 16.8 V/4 A	(x1) USB-A : 5 V - 2.4 A (x1) USB-A : 5 V - 1 A	—	—
NP PRO TRUCK	6 Ah - 155.4 Wh	LiCoO2	7 h	600 A	1500 A	2000 A	12 V/24 V (Pb/Lead only)	QC USB-C: 18 W max	(x1) USB-A : 5 V - 1 A (x1) USB-A : 5 V - 2.1 A	(x1) Cigarette Lighter : 12 V - 10 A	•
NP 12/24V	8.4 Ah - 218 Wh	LiCoO2	4 h	1900 A	3000 A	4000 A	12 V/24 V (Pb/Lead only)	(x1) USB-C : 5 V - 2 A; 9 V - 2 A JACK DC 29 V/5 A	(x2) USB-A : 5 V - 2.4 A	—	•
NP PRO 12/24V	19.5 Ah - 499.59 Wh	LiCoO2	7 h	2300 A	3500 A	5000 A	12 V/24 V (Pb/Lead only)	JACK DC ø5.5: 29 V - 5 A USB-C : 5V/2A 9V/2A	(x2) USB-A : 5 V - 2.4 A	—	•

OPTION

- 67 W Fast USB-C Charger**
✓ Nomad Power PRO 901 FC
087132
- 15 W USB-C Charger**
✓ Nomad Power 401 / 501
✓ Nomad Power PRO 701
/ PRO 801 / PRO 901 FC
087101
- 15 W USB-C Charger**
✓ Nomad Power 401 / 501
✓ Nomad Power PRO 701
/ PRO 801 / PRO 901 FC
087354

218 Wh

NEW
11 2025



**NOMAD POWER
12/24 V**
088931

★★★★★
Ultra High Capacity

499+ Wh

NEW



**NOMAD
POWER
PRO 12/24 V**
088566

Maximum
autonomy

× 2
Increased
vehicle starts

**3 Lights
modes**
Normal
Flashing
S.O.S



12 / 24 V

NOMAD POWER PRO TRUCK

2000 A

600 A
1V/Cell



027527
028845

NOMAD POWER 12/24 V

4000 A

2300 A
1V/Cell



088931



NOMAD POWER PRO 12/24 V

5000 A

2300 A
1V/Cell



088566



Recommendation



NP PRO XL

5 × 180 Ah

NP PRO XXL

5 × 180 Ah

NP PRO TRUCK

5 × 140 Ah

Max capability (minimum charge needed)

NP 12/24V

5 × 180 Ah

× 240 Ah

NP PRO 12/24V

5 × 180 Ah

× 240 Ah



cm



kg

31.1 × 15.2 × 6.5 2.2

25.2 × 15 × 18.8 3.1

24.8 × 24.8 × 9.6 2.4

29.5 × 24.5 × 17.5 4.4

24.6 × 24.5 × 15 5.4



STARTRONIC

BOOSTERS SUPER CAPACITOR

INSIDE

SANS BATTERIE



✓ NO BATTERY INSIDE
✓ NO MAINTENANCE
✓ FAST TO USE

✓ BOOSTER SANS BATTERIE INTERNE
✓ AUCUNE MAINTENANCE
✓ RAPIDE D'UTILISATION

✓ KEINE INTERNE BATTERIE
✓ KEINE WARTUNG
✓ SCHNELL EINSETZBAR

FULL PROTECTION

-40/+65°C




✓ 1 MILLION CYCLES



✓ FAST CHARGE




✓ NO SULFATION DURING STORAGE



✓ UNLIMITED STARTS

EASY TO USE



STARTRONIC 800 : 1 minute
STARTRONIC HYBRID 950 : 1 minute
STARTRONIC SUPERCAP 12 / 24 V : 3 minutes

DC/DC CONVERTER INSIDE (>5V)



800 : 4 minutes
HYBRID 950 : 4 minutes
SUPERCAP 12 / 24 V : 5 minutes

✓ SMART
✓ SAFE
✓ POWERFUL



➕ Output USB

➕ Light

5x
800
F

INSIDE

12 V

5x
950
F

INSIDE

+ Lithium

STARTRONIC 800

800 A

12 V

GO > 5 V

026735



STARTRONIC HYBRID 950

950 A

12 V

GO > 1 V

026117



12 V / 24 V

10x
900
F

INSIDE

STARTRONIC SUPERCAP 12 / 24 V

1050 A

12 V

GO > 7 V

880 A

24 V

082816



INCLUDED
STARTRONIC HYBRID 950
Lithium battery
027411

INCLUDED
STARTRONIC 800
& HYBRID 950
027404

START

1 V/Cell

0 V/Cell

Peak battery

Number of Capacitors

Integrated Inverter

INPUT CHARGE

12 V

12 V / 10 A

5 V / 2 A

internal lithium battery

Light

cm

kg

MADE IN CHINA

STARTRONIC 800

800 A

1 400 A

12 V

5 x 800 F

4 min

60 s

4 min

4 min

5 V / 2 A

40 min

30 min

26,7 x 19,5 x 5

1,86

STARTRONIC HYBRID 950

950 A

1 660 A

12 V

5 x 950 F

4 min

60 s

4 min

4 min

5 V / 2 A

40 min

30 min

25 x 18,5 x 6

1,86

STARTRONIC SUPERCAP 12/24V

1 050 A

1 800 A

12 V

10 x 900 F

5 min

3 min

2 min

2 min

34 x 43 x 20

7

200 ▶ 700 A

	      		 	   	   
056206					
564015					
056404					
056602					
056312					
056329					
056336					
027695					
056343					

NOT INSULATED



			 x 8	
056206	320 A	3 m	—	16 mm ² (CCA)
564015	500 A	3 m	—	25 mm ² (CCA)
056404	700 A	4,5 m	—	35 mm ² (CCA)
056602	1000 A	5,1 m	—	50 mm ² (100% Cu)



		ESSENCE BENZINE PETROL	DIESEL		 $\approx \varnothing$ Cu
056312	200 A 	1,5l		3 m	10 mm ²
056329	320 A 	2,5l		3 m	16 mm ²
056336	500 A 	5,5l	3l	3,5 m	25 mm ²
056343	700 A 	7l	4l	4,5 m	35 mm ²

	40 A	60 A	60 A	200 A	300 A	600 A	700 A
I 100%	30 A	60 A	60 A	100 A	200 A	120 A	120 A
I peak	75 A	150 A	150 A	200 A	300 A	600 A	700 A
max	×↓ 30 mm	×↓ 25 mm	×↓ 25 mm	×↓ 38 mm	×↓ 45 mm	×↓ 40 mm	×↓ 28 mm
max	2.5 mm²	10 mm²	10 mm²	16 mm²	25 mm²	35 mm²	25 mm²
			Compact 				
	(x2)		NEW 				NEW
	055537	055520	071896 071889	053502 053403	053700 053601	053779 053786	025783 025776
	053106	(x2) 024816	(x2) 071872				

EV CHARGING - PORTABLE

10/16 A 1 ph

028975

IP	U ₁	I ₁	P	
66	1 ph	10 / 16 A	2,3 3,7 kW	 5 m



EV CHARGING - STANDARD CABLES

32 A 1 ph

079687

32 A 3 ph  

079694

IP	U ₁	I ₁	P	
55	1 ph	32 A	7,4 kW	5 m
55	3 ph	32 A	22 kW	5 m

AIR COMPRESSOR

**NOMAD AIR
COMPRESSOR**
088795

NEW

INCLUDED



Nozzle set



USB-C USB-C



5 INFLATION MODES

- Car (2.50 bars)
- Motorbike (2.40 bars)
- Ball (4.10 bars)
- Bike (0.55 bars)
- Favorites (1.40 bars)

Ultra light
& Compact

30L/ min



→ INPUT
USB-C

→ OUTPUT
USB-A

OPTION



15 W USB-C Charger
087101



15 W USB-A Charger
087354

	LITHIUM Battery							
	CAPACITY	TYPE	FULL CHARGE					
NOMAD AIR COMPRESSOR	2.5 Ah / 27.75 Wh	Lico02	2h15	10 bars	USB-C : 5V/2A	(x1) USB-A : 5V - 2.1A	6.4 × 5.65 × 17.55 cm	0.61 kg

MEMORY SAVER

**NOMAD OBD
MEMORY SAVER**
085480



included



Clamps - 95 cm



Charger - 1.1 m



FULL
PROTECTION

Ultra light & Compact

Lithium
battery
INSIDE

2 POSSIBILITIES

Normal use



Keep using Nomad OBD
even when discharged



INSIDE

Li-ion 12V - 2 Ah

MEMORY SAVER



OBD < 4 A



< 4 A



14.5 × 7.2 × 3.5 cm



515 g

Connected to booster

CABLE OBD



MEMORY AUTO SAVE CABLE OBD
Fuse 7,5 A - 1,5 m
054202



POWER INVERTERS

12/24 V DC > 230 V AC

12 V  CONVERGYS


CONVERGYS 150
027022



CONVERGYS 300
027053

UK: 027046



12 V  PURE SINE WAVE



PSW
601W RC-12



067332

UK: 067349



PSW
1502W RC-12



067370

UK: 067387



PSW
2002W RC-12



067394

UK: 067400

24 V  MODIFIED SINE WAVE



MSW 82000

027237

UK: 027244

24 V  PURE SINE WAVE



PSW
2002W RC-24



067417

UK: 067424

**INCLUDED
FOR ALL**



48 cm



48 cm



1 m

MADE IN CHINA	Power	Peak power	Pure Sin Wave	Optimum Efficiency	Input DC	Output AC	Output USB (2.1) DC	 max 150 W	 cables	 1.5 mm ²	 Universal	 6 m	 2.2 kg	 cm	 L x W x H cm : kg
CONVERGYS 150	150 W	300 W	—	90,5 %	12 V	230 V	5 V · 2 A	•	—	1.5 mm ²	•	—	0,5 kg	N/A	8 × 16,5 × 24,7 / 0,45
CONVERGYS 300	300 W	600 W	—	85 %	12 V	230 V	5 V · 2 A	•	•	2.5 mm ²	•	—	0,95 kg	N/A	21,3 × 20 × 6,8 / 0,95
PSW 601W RC-12	600 W	1200 W	•	90 %	12 V	230 V	5 V · 2 A	—	cables	6 mm ²	•	•	6 m	2,2 kg	26,5 × 17 × 7,5 31 × 22 × 12 2,3
PSW 1502W RC-12	1500 W	3000 W	•	90 %	12 V	230 V	5 V · 2 A	—	cables	16 mm ²	•	•	6 m	5 kg	37,5 × 21 × 10 44 × 27 × 16 4,6
PSW 2002W RC-12	2000 W	4000 W	•	90 %	12 V	230 V	5 V · 2 A	—	cables	22 mm ²	•	•	6 m	6,25 kg	38,5 × 25 × 10 43 × 32 × 16,5 5,7
MSW 82000	2000 W	4000 W	—	80 %	24 V	230 V	5 V · 2 A	—	cables	12 mm ²	•	•	—	5,8 kg	35 × 20 × 28 45,3 × 26,8 × 16,1 7,9
PSW 2002W RC-24	2000 W	4000 W	•	90 %	24 V	230 V	5 V · 2 A	—	cables	12 mm ²	•	•	6 m	6,25 kg	38,5 × 25 × 10 43 × 32 × 16,5 5,7



TBP

TESTERS TRADITIONAL

YouTube



PLAYLIST
BATTERY
TESTERS



TBP 100

6/12 V 20 · 100 Ah

PB BATTERY

055131



TBP 500

12 V 10 · 160 Ah

PB BATTERY

055148



BT

TESTERS DIGITAL



BT 001

12 V 7 · 230 Ah

PB BATTERY

056640



DBT

TESTERS COLOR SCREEN



DBT 500

6/12 V 7 · 240 Ah

ALTERNATOR 6/12 V PB BATTERY

079823



BTW

TESTERS CONNECTED



BTW 6V/12V

6/12 V 7 · 240 Ah

ALTERNATOR 12 V PB BATTERY

077355

x14
Languages

x12
Languages



MADE IN
CHINA



A

V



CHARGE & START
SYSTEM VEHICLE



PRINT
PAPER

DIGITAL

RESULT

TEMPERATURE
COMPENSATION

kg

cm

L x W x H cm / kg

	6-12 V	20 · 100 Ah	•	•	12 V	—	—	5/10s	15 min	—	—	1.5	16x1.8x30	30.7x17.2x10.3 / 1.5
TBP 100	6-12 V	20 · 100 Ah	•	•	12 V	—	—	5/10s	15 min	—	—	1.5	16x1.8x30	30.7x17.2x10.3 / 1.5
TBP 500	12 V	10 · 160 Ah	•	•	12 V	—	—	15s	15 min	—	—	3.75	27x26x13	31x28.6x18.2 / 3.8
BTW 6V/12V	6-12 V	7 · 240 Ah	•	min 4.5 V	12 V	—	—	1s	instant	•	—	0.11	11x3x2	7.5x4.5x16.4 / 0.16
DBT 710	6-12 V	7 · 240 Ah	•	min 3 V	12 / 24 V	—	color screen 3.2"	1s	instant	•	—	0.9	10x3.5x20.5	10x18.4x25.3
PBT 710	12 V	5 · 220 Ah	•	min 6 V	12 V	•	colour screen	1s	instant	•	—	0.62	9x4x20	25x18x6.7 / N/A
PBT 720	6-12 V	7 · 240 Ah	•	min 3 V	6/12/24 V	•	colour screen 3.2"	1s	instant	•	2 x 3.7 V - 2 A lithium-ion polymer batteries	0.9	26x10.5x5	27.2x36.4x9.3 / 2



TESTERS
COLOR SCREEN

[illegible]

 **x12**
Languages
Sprachen



6 / 12 V

DBT 710

6/12 V 7 > 240 Ah

ALTERNATOR 6:12:24V PB BATTERY

083585



PBT

TESTERS WITH PRINTERS



 YouTube

PLAYLIST

BATTERY TESTERS

 **x13**
Languages

NEW

PRINTER • 12 V

PBT 710

12 V 5,220 Ah

ALTERNATOR 12 V PB BATTERY

088849



OPTIONS



056633



25 mm	PBT 710 / PBT 720
-------	-------------------

XL Full Color screen

- Complete analysis
- Historical data
- Graphical data analysis

• Download app & Print

x12
languages



PRINTER • 6 / 12 V

PBT 720

6/12 V 7,240 Ah

ALTERNATOR 6/12/24 V PB BATTERY

083240



	TEST														CURRENT CCA SAE	
	Battery Batteries: Ladegeräte	Alternator Circuit Circuit alterateur Lichtmaschinenschaltkreis			LIQUID	START /STOP ENGINE	EFB	AGM VRLA/GEL								
Recommendation																
TBP 100			12 V	—	•	—	—	—			20 > 100 Ah					—
TBP 500			12 V	—	•	—	—	—				10 > 160 Ah				0 > 1000 A
BTW 6V/12V			12 V	—	•	•	•	•			7 > 240 Ah					10 > 2000 A
BT 001			12 V	—	•	•	•	•	7 > 230 Ah		7 > 230 Ah					—
DBT 410			6-12 V	—	•	•	•	•			7 > 240 Ah					10 > 2000 A
DBT 710			6-12 V	—	•	•	•	•			7 > 240 Ah					—
PBT 710			12 V	•	•	•	•	•			5 > 220 Ah					10 > 2000 A
PBT 720			6-12 V		•	•	•	•			7 > 240 Ah					10 > 2000 A



WELDING COLLISION REPAIR CHARGE

2026B

GYS France

Headquarters

1 rue de la Croix des Landes
CS 54159
53941 Saint-Berthevin - Cedex
Laval - France
Tel +33 2 43 01 23 60
E-mail service.client@gys.fr



ZI, 134 bd des Loges
53941 Saint-Berthevin
Laval - France

Logistic center

2 Rue Jean Dausset
53810 Changé - France
Tel +33 2 43 01 54 33

GYS China

Lot N°15 - 6666 bd Songze
201706 Qingpu
Shanghai - China
Tel +86 6221 4461
Fax +86 5226 0067
www.gys-china.com.cn
E-mail
contact@gys-china.com.cn

GYS Germany

Professor-Wieler
Straße 11
52070 Aachen
Deutschland
Tel +49 241/189-23-710
Fax +49 241/189-23-719
E-mail aachen@gys.fr

GYS Italia

Via Porta Est, 7
30020 Marcon - VE
Italia
Tel +39 041 53 21 565
E-mail italia@gys.fr

GYS UK

Unit 3 - Great Central Way
Rugby - Warwickshire
CV21 3XH
United Kingdom
Tel +44 1926 338 609
Fax +44 1926 429 764
E-mail uk@gys.fr

GYS Ibérica

Avenida Pirineos 31
Nave 9
San Sebastian de los Reyes
28703 Madrid
España
Tel +34 917 409 790
E-mail iberica@gys.fr



LinkedIn
 Youtube
 Facebook
 Instagram



YOUKU

www.gys.fr
www.gys-china.com.cn

MARKETING



Retail display space with 2 shelves
060784



A - Barnum
3 x 3 m
098022

B - Open
Barnum
2 x 2 m
098039

C - Oriflamme
3 x 0,50 m
098015

